


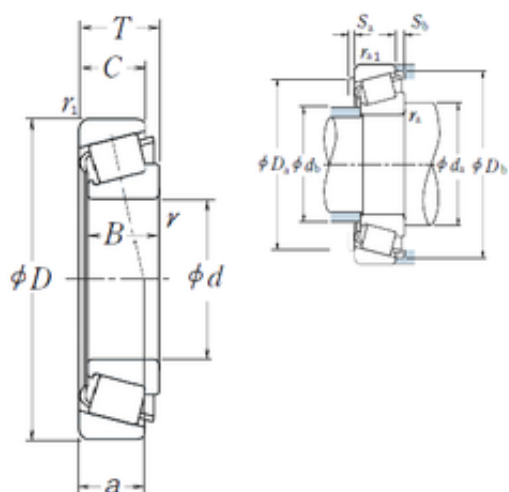

Bearing No. HR32215J

D	130 mm
d	75 mm
T	33,25 mm
B	31 mm
C	27 mm
a	29,8 mm
e	0.44
Cr	16900
Y0	0.76
db	84
da	87
Y1	1.4
B_	31
Sb	6
C0	219
Sa	4
D_	130
Z_	20
C_	27
C0r	22400
DA_	14.592
Iso	4DC
DE_	116.762
D_b	125
DI_	88.101
SBRG	22
SDM_	102.432
D_a2	113
KBRG	3111
yobi	HR32215J

D_a1	121
mass	1.72
TC-RA	220
r min.	2 mm
Weight	1,72 Kg
TC-DA1	15.355
TC-DA2	13.829
TC-SLR	22
Da min	113 mm
LangID	1
ALPHA_	16.173
Db min.	125 mm
Oil rpm	3800
db max.	84 mm
Da max.	121 mm
ra max.	2 mm
hidYobi	HR32215J
da min.	87 mm
T-ALP21	32
rb max.	1,5 mm
T-ALP22	20
T-ALP23	40
GRS rpm	2800
inner r	2
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	2
outer rb	1.5
TC-BET22	0

Size (mm)	75x130x33.25
Width (mm)	33,25
Prod_Type3	TRBSR_MD_A
Bearing number	HR32215J
Bore Diameter (mm)	75
Outer Diameter (mm)	130
Calculation factor (e)	0,44
Calculation factor (Y0)	0,76
(Oil) Lubrication Speed	3800 r/min
(Grease) Lubrication Speed	2800 r/min
Basic dynamic load rating (C)	165 kN
Basic static load rating (C0)	219 kN