


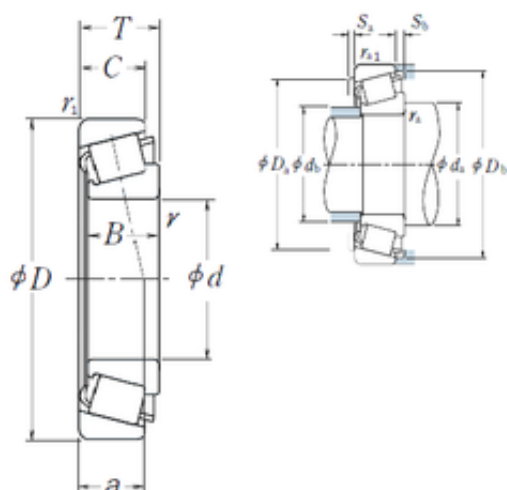

Bearing No. HR32216J

a	30,6 mm
e	0.42
d	80 mm
D	140 mm
T	35,25 mm
B	33 mm
C	28 mm
B_	33
da	95
Y0	0.79
C0	254
D_	140
Sb	7
Sa	4
db	90
Z_	20
Y1	1.4
C_	28
Cr	19600
DE_	125.306
Iso	3EC
DI_	93.404
C0r	25900
DA_	16.163
D_b	134
D_a2	122
SBRG	22
SDM_	109.355
D_a1	130
yobi	HR32216J

KBRG	3111
mass	2.13
TC-RA	243
r min.	2,5 mm
LangID	1
TC-DA2	15.365
Da min	122 mm
TC-SLR	23
ALPHA_	15.643
TC-DA1	16.96
Weight	2,13 Kg
T-ALP22	17
da min.	95 mm
r1 min.	2 mm
T-ALP21	31
db max.	90 mm
hidYobi	HR32216J
rb max.	2 mm
T-ALP23	4
Da max.	130 mm
Oil rpm	3400
GRS rpm	2600
ra max.	2 mm
inner r	2.5
Db min.	134 mm
outer r	2
inner ra	2
hidTable	ecat_NSTPRM
outer rb	2
Category	Bearings
TC-BET23	0
TC-BET21	4

TC-BET22	0
Inventory	0.0
Size (mm)	80x140x35.25
Prod_Type3	TRBSR_MD_A
Width (mm)	35,25
Product Group	B04334
Bearing number	HR32216J
Weight / Kilogram	2.06
Manufacturer Name	NSK
Bore Diameter (mm)	80
Outer Diameter (mm)	140
Minimum Buy Quantity	N/A
Calculation factor (e)	0,42
(Oil) Lubrication Speed	3400 r/min
Calculation factor (Y0)	0,79
(Grease) Lubrication Speed	2600 r/min
Basic dynamic load rating (C)	192 kN
Basic static load rating (C0)	254 kN