


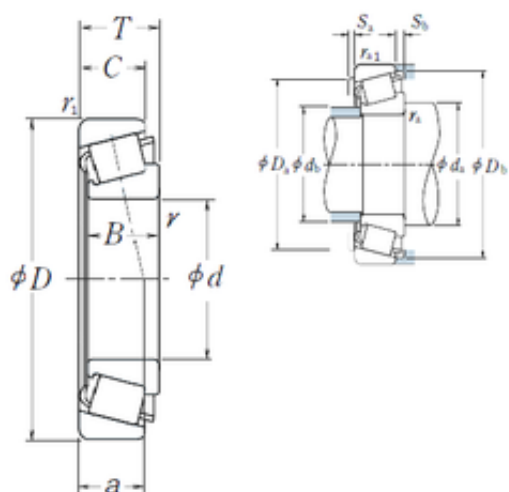

Bearing No. HR32219J

D	170 mm
d	95 mm
T	45,5 mm
B	43 mm
C	37 mm
a	39,3 mm
e	0.42
Cr	29500
Y0	0.79
db	108
da	113
Y1	1.4
B_	43
Sb	8.5
C0	400
Sa	5
D_	170
Z_	20
C_	37
C0r	40500
DA_	19.479
Iso	3FC
DE_	150.619
D_b	161
DI_	112.57
SBRG	22
SDM_	131.595
D_a2	147
KBRG	3111
yobi	HR32219J

D_a1	158
mass	4.22
TC-RA	294
r min.	3 mm
Weight	4,22 Kg
TC-DA1	20.519
TC-DA2	18.438
TC-SLR	30
Da min	147 mm
LangID	1
ALPHA_	15.643
Db min.	161 mm
Oil rpm	2800
db max.	108 mm
Da max.	158 mm
ra max.	2,5 mm
hidYobi	HR32219J
da min.	113 mm
T-ALP21	31
rb max.	2 mm
T-ALP22	17
T-ALP23	4
GRS rpm	2200
inner r	3
outer r	2.5
r1 min.	2,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	2.5
outer rb	2
TC-BET22	0

Size (mm)	95x170x45.5
Width (mm)	45,5
Prod_Type3	TRBSR_MD_A
Bearing number	HR32219J
Bore Diameter (mm)	95
Outer Diameter (mm)	170
Calculation factor (e)	0,42
Calculation factor (Y0)	0,79
(Oil) Lubrication Speed	2800 r/min
(Grease) Lubrication Speed	2200 r/min
Basic dynamic load rating (C)	289 kN
Basic static load rating (C0)	400 kN