


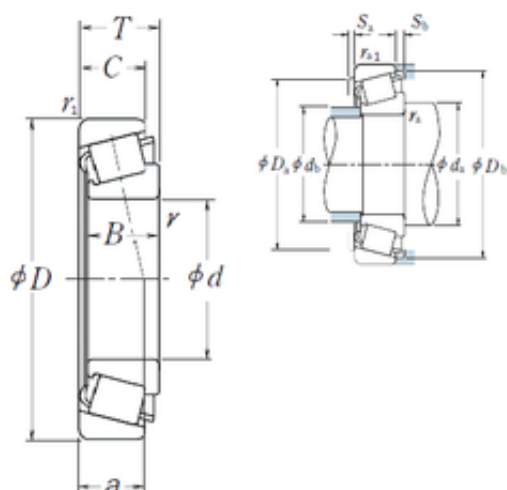

Bearing No. HR32220J

D	180 mm
d	100 mm
T	49 mm
B	46 mm
C	39 mm
a	41,5 mm
e	0.42
Cr	33000
Y0	0.79
db	115
da	118
Y1	1.4
B_	46
Sb	10
C0	450
Sa	5
D_	180
Z_	20
C_	39
C0r	46000
DA_	20.578
Iso	3FC
DE_	159.104
D_b	171
DI_	118.858
SBRG	22
SDM_	138.981
D_a2	155
KBRG	3111
yobi	HR32220J

D_a1	168
mass	5.05
TC-RA	310.744
r min.	3 mm
Weight	5,05 Kg
TC-DA1	21.688
TC-DA2	19.468
TC-SLR	32
Da min	155 mm
LangID	1
ALPHA_	15.643
Db min.	171 mm
Oil rpm	2600
db max.	115 mm
Da max.	168 mm
ra max.	2,5 mm
hidYobi	HR32220J
da min.	118 mm
T-ALP21	31
rb max.	2 mm
T-ALP22	17
T-ALP23	4
GRS rpm	2000
inner r	3
outer r	2.5
r1 min.	2,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	2.5
outer rb	2
TC-BET22	0

Size (mm)	100x180x49
Width (mm)	49
Prod_Type3	TRBSR_MD_A
Bearing number	HR32220J
Bore Diameter (mm)	100
Outer Diameter (mm)	180
Calculation factor (e)	0,42
Calculation factor (Y0)	0,79
(Oil) Lubrication Speed	2600 r/min
(Grease) Lubrication Speed	2000 r/min
Basic dynamic load rating (C)	325 kN
Basic static load rating (C0)	450 kN