


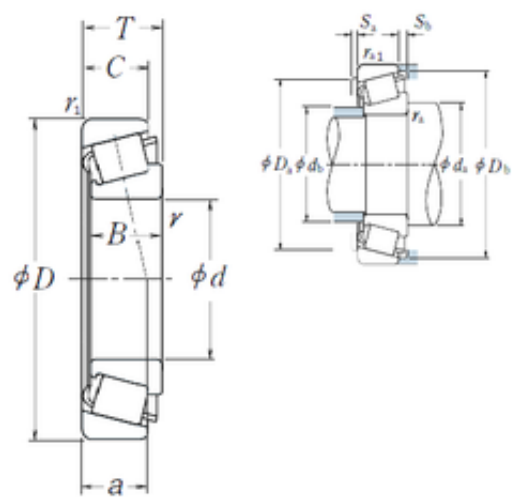

Bearing No. HR32221J

D	190 mm
d	105 mm
T	53 mm
B	50 mm
C	43 mm
a	44,8 mm
e	0.42
Cr	37000
Y0	0.79
db	120
da	123
Y1	1.4
B_	50
Sb	10
C0	510
Sa	5
D_	190
Z_	19
C_	43
C0r	52000
DA_	21.651
Iso	3FC
DE_	167.309
D_b	180
DI_	125.064
SBRG	22
SDM_	146.187
D_a2	162
KBRG	3111
yobi	HR32221J

D_a1	178
mass	6.25
TC-RA	328.115
r min.	3 mm
Weight	6,25 Kg
TC-DA1	22.9
TC-DA2	20.402
TC-SLR	36
Da min	162 mm
LangID	1
ALPHA_	15.643
Db min.	180 mm
Oil rpm	2600
db max.	120 mm
Da max.	178 mm
ra max.	2,5 mm
hidYobi	HR32221J
da min.	123 mm
T-ALP21	31
rb max.	2 mm
T-ALP22	17
T-ALP23	4
GRS rpm	1900
inner r	3
outer r	2.5
r1 min.	2,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	2.5
outer rb	2
TC-BET22	0

Size (mm)	105x190x53
Width (mm)	53
Prod_Type3	TRBSR_MD_A
Bearing number	HR32221J
Bore Diameter (mm)	105
Outer Diameter (mm)	190
Calculation factor (e)	0,42
Calculation factor (Y0)	0,79
(Oil) Lubrication Speed	2600 r/min
(Grease) Lubrication Speed	1900 r/min
Basic dynamic load rating (C)	360 kN
Basic static load rating (C0)	510 kN