


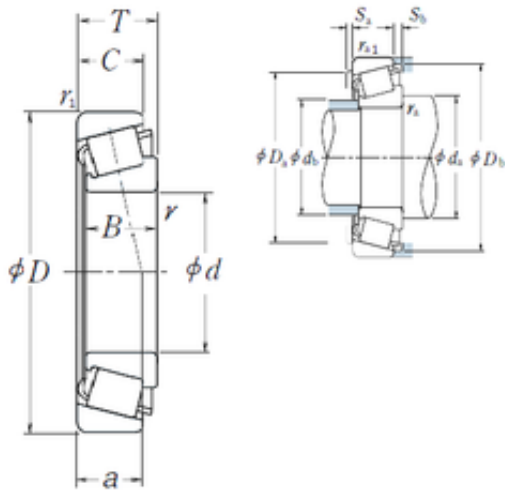

Bearing No. HR32226J

D	230 mm
d	130 mm
T	67,75 mm
B	64 mm
C	54 mm
a	56,9 mm
e	0.44
Cr	54000
Y0	0.76
db	147
da	151
Y1	1.4
B_	64
Sb	13.5
C0	790
Sa	7
D_	230
Z_	19
C_	54
C0r	80500
DA_	25.448
Iso	4FD
DE_	202.748
D_b	219
DI_	153.593
SBRG	22
SDM_	178.171
D_a2	196
KBRG	3111
yobi	HR32226J

D_a1	216
mass	11.3
TC-RA	388
r min.	4 mm
Weight	11,3 Kg
TC-DA1	27.08
TC-DA2	23.816
TC-SLR	47
Da min	196 mm
LangID	1
ALPHA_	16.173
Db min.	219 mm
Oil rpm	2000
db max.	147 mm
Da max.	216 mm
ra max.	3 mm
hidYobi	HR32226J
da min.	151 mm
T-ALP21	32
rb max.	2,5 mm
T-ALP22	20
T-ALP23	40
GRS rpm	1500
inner r	4
outer r	3
r1 min.	3 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	3
outer rb	2.5
TC-BET22	0

Size (mm)	130x230x67.75
Width (mm)	67,75
Prod_Type3	TRBSR_MD_A
Bearing number	HR32226J
Bore Diameter (mm)	130
Outer Diameter (mm)	230
Calculation factor (e)	0,44
Calculation factor (Y0)	0,76
(Oil) Lubrication Speed	2000 r/min
(Grease) Lubrication Speed	1500 r/min
Basic dynamic load rating (C)	530 kN
Basic static load rating (C0)	790 kN