


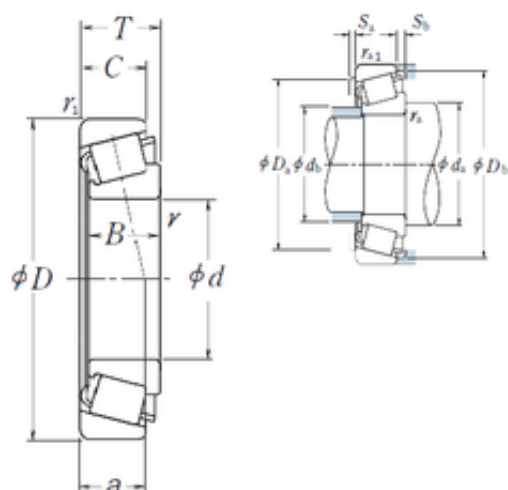

Bearing No. HR32052XJ

D	400 mm
d	260 mm
T	87 mm
B	87 mm
C	65 mm
a	86,3 mm
e	0.43
Cr	118000
Y0	0.76
db	287
da	293
Y1	1.4
B_	87
Sb	22
C0	2160
Sa	14
D_	400
Z_	27
C_	65
C0r	220000
DA_	34.218
Iso	4FC
DE_	363.275
D_b	383
DI_	297.701
SBRG	20
SDM_	330.488
D_a2	357
KBRG	3111
yobi	HR32052XJ

D_a1	382
mass	38.5
TC-RA	685.5
r min.	5 mm
Weight	38,5 Kg
TC-DA1	35.887
TC-DA2	32.549
TC-SLR	64
Da min	357 mm
LangID	1
ALPHA_	16.167
Db min.	383 mm
Oil rpm	1100
db max.	287 mm
Da max.	382 mm
ra max.	4 mm
hidYobi	HR32052XJ
da min.	287 mm
T-ALP21	32
rb max.	3 mm
T-ALP22	20
T-ALP23	0
GRS rpm	800
inner r	5
outer r	4
r1 min.	4 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	3
inner ra	4
outer rb	3
TC-BET22	0

Size (mm)	260x400x87
Width (mm)	87
Prod_Type3	TRBSR_MD_A
Bearing number	HR32052XJ
Bore Diameter (mm)	260
Outer Diameter (mm)	400
Calculation factor (e)	0,43
Calculation factor (Y0)	0,76
(Oil) Lubrication Speed	1100 r/min
(Grease) Lubrication Speed	800 r/min
Basic dynamic load rating (C)	1160 kN
Basic static load rating (C0)	2160 kN