


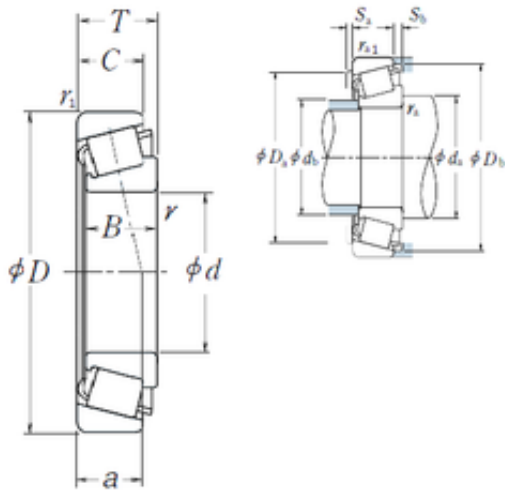

Bearing No. HR32064XJ

D	480 mm
d	320 mm
T	100 mm
B	100 mm
C	74 mm
a	104,5 mm
e	0.46
Cr	153000
Y0	0.72
db	350
da	347
Y1	1.3
B_	100
Sb	26
C0	2910
Sa	15
D_	480
Z_	28
C_	74
C0r	297000
DA_	39.271
Iso	4GD
DE_	438.264
D_b	461
DI_	362.878
SBRG	20
SDM_	400.571
D_a2	430
KBRG	3111
yobi	HR32064XJ

D_a1	462
mass	60
TC-RA	786.5
r min.	5 mm
Weight	60 Kg
TC-DA1	41.175
TC-DA2	37.367
TC-SLR	73
Da min	430 mm
LangID	1
ALPHA_	17
Db min.	461 mm
Oil rpm	850
db max.	350 mm
Da max.	462 mm
ra max.	4 mm
hidYobi	HR32064XJ
da min.	347 mm
T-ALP21	34
rb max.	3 mm
T-ALP22	0
T-ALP23	0
GRS rpm	630
inner r	5
outer r	4
r1 min.	4 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	3
inner ra	4
outer rb	3
TC-BET22	0

Size (mm)	320x480x100
Width (mm)	100
Prod_Type3	TRBSR_MD_A
Bearing number	HR32064XJ
Bore Diameter (mm)	320
Outer Diameter (mm)	480
Calculation factor (e)	0,46
Calculation factor (Y0)	0,72
(Oil) Lubrication Speed	850 r/min
(Grease) Lubrication Speed	630 r/min
Basic dynamic load rating (C)	1510 kN
Basic static load rating (C0)	2910 kN