


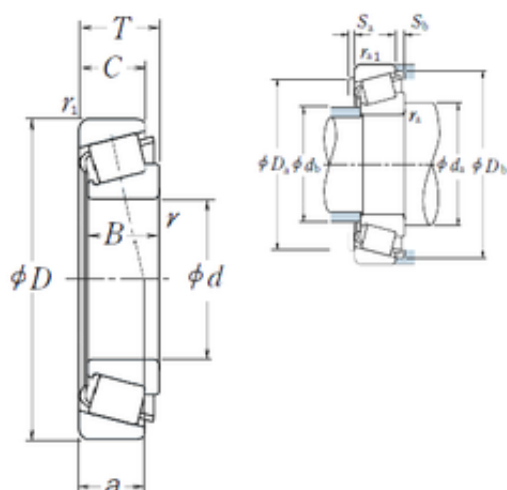

Bearing No. HR322/22C

D	50 mm
d	22 mm
T	19,25 mm
B	18 mm
C	15 mm
a	15,2 mm
e	0.51
Cr	3400
Y0	0.65
db	29
da	31
Y1	1.2
B_	18
Sb	4
C0	39.5
Sa	2
D_	50
Z_	17
C_	15
C0r	4000
DA_	5.711
Iso	-
DE_	41.674
D_b	48
DI_	31.066
SBRG	22
SDM_	36.37
D_a2	39
KBRG	3111
yobi	HR322/22C

D_a1	44
mass	0.185
TC-RA	71.688
r min.	1 mm
Weight	0,185 Kg
TC-DA1	6.253
TC-DA2	5.168
TC-SLR	12.5
Da min	39 mm
LangID	1
ALPHA_	18.75
Db min.	48 mm
Oil rpm	10000
db max.	29 mm
Da max.	44 mm
ra max.	1 mm
hidYobi	HR322/22C
da min.	31 mm
T-ALP21	37
rb max.	1 mm
T-ALP22	30
T-ALP23	0
GRS rpm	7500
inner r	1
outer r	1
r1 min.	1 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	5
inner ra	1
outer rb	1
TC-BET22	0

Size (mm)	22x50x19.25
Width (mm)	19,25
Prod_Type3	TRBSR_MD_A
Bearing number	HR322/22C
Bore Diameter (mm)	22
Outer Diameter (mm)	50
Calculation factor (e)	0,51
Calculation factor (Y0)	0,65
(Oil) Lubrication Speed	10000 r/min
(Grease) Lubrication Speed	7500 r/min
Basic dynamic load rating (C)	33,5 kN
Basic static load rating (C0)	39,5 kN