


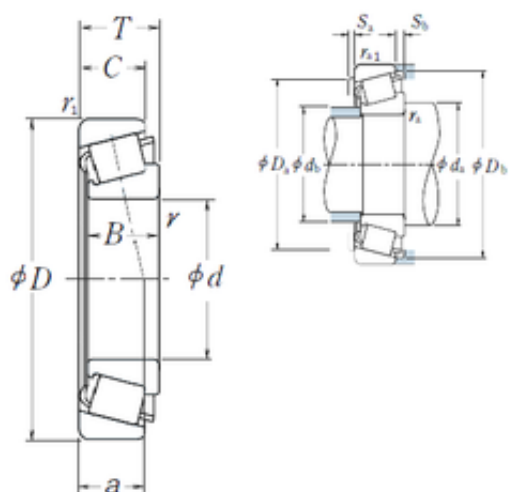

Bearing No. HR322/28

D	58 mm
d	28 mm
T	20,25 mm
B	19 mm
C	16 mm
a	14,6 mm
e	0.37
Cr	4850
Y0	0.89
db	34
da	37
Y1	1.6
B_	19
Sb	4
C0	54
Sa	2
D_	58
Z_	16
C_	16
C0r	5500
DA_	7.354
Iso	-
DE_	50.153
D_b	55
DI_	35.942
SBRG	22
SDM_	43.048
D_a2	49
KBRG	3111
yobi	HR322/28

D_a1	52
mass	0.243
TC-RA	112.337
r min.	1 mm
Weight	0,243 Kg
TC-DA1	7.84
TC-DA2	6.868
TC-SLR	14
Da min	49 mm
LangID	1
ALPHA_	13.833
Db min.	55 mm
Oil rpm	9000
db max.	34 mm
Da max.	52 mm
ra max.	1 mm
hidYobi	HR322/28
da min.	37 mm
T-ALP21	27
rb max.	1 mm
T-ALP22	40
T-ALP23	0
GRS rpm	6300
inner r	1
outer r	1
r1 min.	1 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	1
outer rb	1
TC-BET22	0

Size (mm)	28x58x20.25
Width (mm)	20,25
Prod_Type3	TRBSR_MD_A
Bearing number	HR322/28
Bore Diameter (mm)	28
Outer Diameter (mm)	58
Calculation factor (e)	0,37
Calculation factor (Y0)	0,89
(Oil) Lubrication Speed	9000 r/min
(Grease) Lubrication Speed	6300 r/min
Basic dynamic load rating (C)	47,5 kN
Basic static load rating (C0)	54 kN