


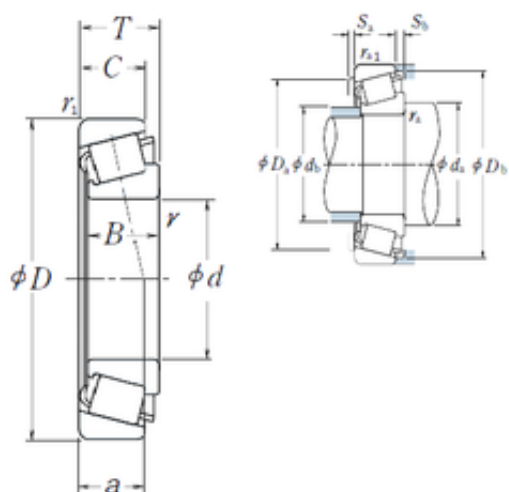

Bearing No. HR322/28CJ

e	0.56
d	28 mm
D	58 mm
T	20,25 mm
B	19 mm
C	16 mm
a	16,8 mm
db	33
B_	19
Y0	0.59
da	37
C0	49.5
Sa	2
Sb	4
Z_	17
Y1	1.1
C_	16
Cr	4300
D_	58
Iso	5DD
D_b	55
C0r	5050
SDM_	41.939
mass	0.251
SBRG	22
D_a2	45
KBRG	3111
yobi	HR322/28CJ
D_a1	52
TC-RA	75.439

LangID	1
TC-SLR	13.5
Da min	45 mm
ALPHA_	20.566
r min.	1 mm
TC-DA1	7.458
TC-DA2	6.131
Weight	0,251 Kg
hidYobi	HR322/28CJ
Oil rpm	9000
T-ALP21	41
GRS rpm	6300
ra max.	1 mm
Db min.	55 mm
rb max.	1 mm
db max.	33 mm
T-ALP22	8
Da max.	52 mm
da min.	37 mm
r1 min.	1 mm
inner r	1
outer r	1
T-ALP23	0
TC-BET22	35
TC-BET21	5
hidTable	ecat_NSTPRM
TC-BET23	0
inner ra	1
outer rb	1
Size (mm)	28x58x20.25
Width (mm)	20,25
Prod_Type3	TRBSR_MD_A

Bearing number	HR322/28CJ
Bore Diameter (mm)	28
Outer Diameter (mm)	58
Calculation factor (e)	0,56
(Oil) Lubrication Speed	9000 r/min
Calculation factor (Y0)	0,59
(Grease) Lubrication Speed	6300 r/min
Basic dynamic load rating (C)	42 kN
Basic static load rating (C0)	49,5 kN