


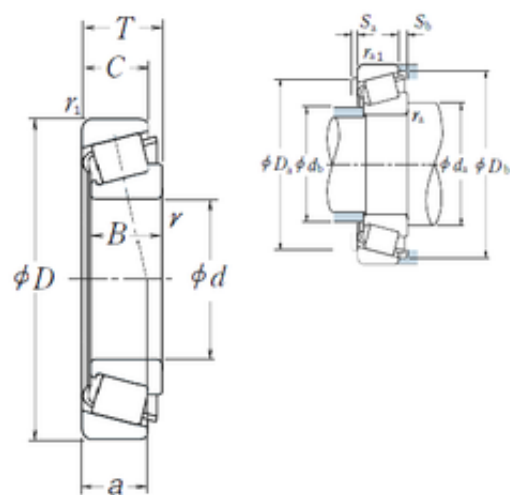

Bearing No. HR32204CJ

e	0.52
d	20 mm
D	47 mm
T	19,25 mm
B	18 mm
C	15 mm
a	14,5 mm
db	25
B_	18
Y0	0.64
da	29
C0	33.5
Sa	2
Sb	4
Z_	14
Y1	1.2
C_	15
Cr	3200
D_	47
Iso	5DD
D_b	44
C0r	3400
SDM_	33.244
mass	0.166
SBRG	22
D_a2	36
KBRG	3111
yobi	HR32204CJ
D_a1	41
TC-RA	66.249

LangID	1
TC-SLR	12.5
Da min	36 mm
ALPHA_	19
r min.	1 mm
TC-DA1	6.742
TC-DA2	5.477
Weight	0,166 Kg
hidYobi	HR32204CJ
Oil rpm	11000
T-ALP21	38
GRS rpm	8000
ra max.	1 mm
Db min.	44 mm
rb max.	1 mm
db max.	25 mm
T-ALP22	0
Da max.	41 mm
da min.	29 mm
r1 min.	1 mm
inner r	1
outer r	1
T-ALP23	0
TC-BET22	50
TC-BET21	5
hidTable	ecat_NSTPRM
TC-BET23	0
inner ra	1
outer rb	1
Size (mm)	20x47x19.25
Width (mm)	19,25
Prod_Type3	TRBSR_MD_A

Bearing number	HR32204CJ
Bore Diameter (mm)	20
Outer Diameter (mm)	47
Calculation factor (e)	0,52
(Oil) Lubrication Speed	11000 r/min
Calculation factor (Y0)	0,64
(Grease) Lubrication Speed	8000 r/min
Basic dynamic load rating (C)	31,5 kN
Basic static load rating (C0)	33,5 kN