


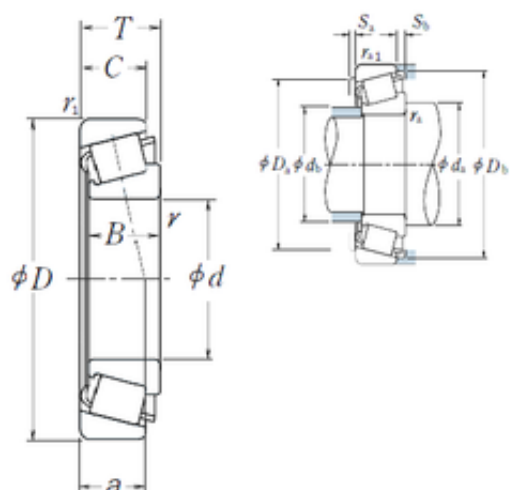

Bearing No. HR32204J

D	47 mm
d	20 mm
T	19,25 mm
B	18 mm
C	15 mm
a	12,6 mm
e	0.33
Cr	3650
Y0	1
db	25
da	29
Y1	1.8
B_	18
Sb	4
C0	37.5
Sa	3
D_	47
Z_	14
C_	15
C0r	3850
DA_	6.511
Iso	2DD
DE_	39.127
D_b	44.5
DI_	26.61
SBRG	22
SDM_	32.869
D_a2	38
KBRG	3111
yobi	HR32204J

D_a1	41
mass	0.161
TC-RA	97.849
r min.	1 mm
Weight	0,161 Kg
TC-DA1	6.972
TC-DA2	6.05
TC-SLR	13
Da min	38 mm
LangID	1
ALPHA_	12.467
Db min.	44,5 mm
Oil rpm	11000
db max.	25 mm
Da max.	41 mm
ra max.	1 mm
hidYobi	HR32204J
da min.	29 mm
T-ALP21	24
rb max.	1 mm
T-ALP22	56
T-ALP23	0
GRS rpm	8500
inner r	1
outer r	1
r1 min.	1 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	1
outer rb	1
TC-BET22	5

Size (mm)	20x47x19.25
Width (mm)	19,25
Prod_Type3	TRBSR_MD_A
Bearing number	HR32204J
Bore Diameter (mm)	20
Outer Diameter (mm)	47
Calculation factor (e)	0,33
Calculation factor (Y0)	1
(Oil) Lubrication Speed	11000 r/min
(Grease) Lubrication Speed	8500 r/min
Basic dynamic load rating (C)	35,5 kN
Basic static load rating (C0)	37,5 kN