


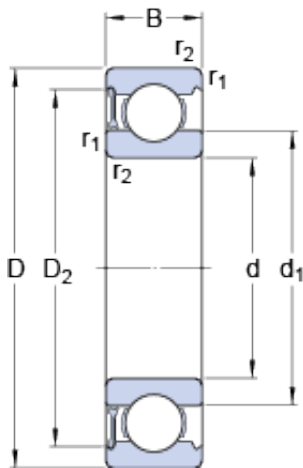

Bearing No. 6008-RZ

D	68 mm
d	40 mm
B	15 mm
Size (mm)	68x40x15
Width (mm)	15
Mass bearing	0.19 kg
D ₂	61.1 mm
d ₁	49.25 mm
Limiting speed	14000 r/min
Bearing number	6008-RZ
Reference speed	22000 r/min
D _a max.	63.4 mm
r _a max.	1 mm
Bore Diameter (mm)	68
d _a max.	49.2 mm
d _a min.	44.6 mm
Outer Diameter (mm)	40
d _a - max.	49.2 mm
D _a - max.	63.4 mm
r _a - max.	1 mm
d _a - min.	44.6 mm
d ₁ ?	49.25 mm
D ₂ ?	61.1 mm
r _{1,2} - min.	1 mm
Basic dynamic load rating C	17.8 kN
Basic dynamic load rating - C	17.8 kN
Fatigue load limit P _u	0.49 kN
Calculation factor k _r	0.025

Calculation factor f_0	15
Calculation factor - f_0	15
Calculation factor - k_r	0.025
Fatigue load limit - P_u	0.49 kN
Basic static load rating C_0	11 kN
Basic static load rating - C_0	11 kN