


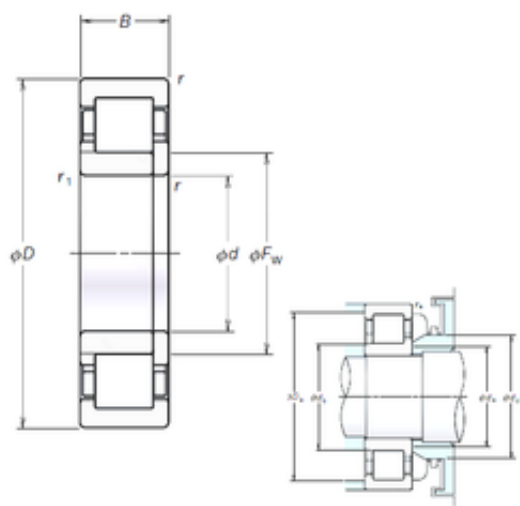

Bearing No. NUP2230EM

|        |           |
|--------|-----------|
| r      | 3         |
| D      | 270 mm    |
| C      | 73 mm     |
| S      | 3 mm      |
| B      | 73 mm     |
| d      | 150 mm    |
| Fw     | 182 mm    |
| Z_     | 18        |
| r1     | 3         |
| da     | 163       |
| C0     | 930       |
| ra     | 2.5       |
| rb     | 2.5       |
| B_     | 73        |
| D_     | 270       |
| DA_    | 30        |
| DE_    | 242       |
| DI_    | 182       |
| yobi   | NUP2230EM |
| mass   | 19.8      |
| SDM_   | 212       |
| KBRG   | 4165      |
| SBRG   | 22        |
| db min | 163 mm    |
| C_conv | 635000    |
| Db max | 257 mm    |
| r min. | 3 mm      |
| ALPHA_ | 0         |
| LangID | 1         |
| dd min | 196       |
|        |           |

|                               |             |
|-------------------------------|-------------|
| dc min                        | 184         |
| Weight                        | 19,3 Kg     |
| db max                        | 177         |
| da min.                       | 163 mm      |
| D_a max                       | 257         |
| r1 min.                       | 3 mm        |
| rb max.                       | 2,5 mm      |
| TSR rpm                       | 2800        |
| Da max.                       | 257 mm      |
| GRS rpm                       | 2000        |
| Oil rpm                       | 2600        |
| ra max.                       | 2,5 mm      |
| hidYobi                       | NUP2230EM   |
| db max.                       | 177 mm      |
| hidTable                      | ecat_NSCLDR |
| Macha rpm                     | 3800        |
| Size (mm)                     | 150x270x73  |
| Prod_Type3                    | CRB_SR_NUP  |
| Width (mm)                    | 73          |
| Bearing number                | NUP2230EM   |
| Bore Diameter (mm)            | 150         |
| Outer Diameter (mm)           | 270         |
| (Grease) Lubrication Speed    | 2000 r/min  |
| Basic static load rating (C0) | 930 kN      |
| Basic dynamic load rating (C) | 635 kN      |