


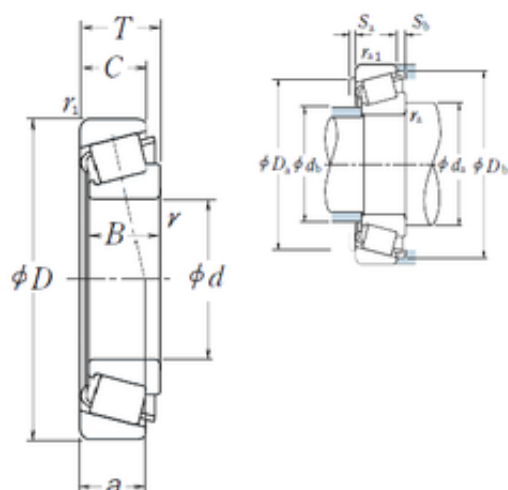

Bearing No. HR32005XJ

a	11,8 mm
e	0.43
d	25 mm
D	47 mm
T	15 mm
B	15 mm
C	11,5 mm
B_	15
da	33
Y0	0.77
C0	33
D_	47
Sb	3.5
Sa	3
db	30
Z_	19
Y1	1.4
C_	11.5
Cr	2800
DE_	40.691
Iso	4CC
DI_	31.148
C0r	3400
DA_	4.954
D_b	45
D_a2	40
SBRG	20
SDM_	35.92
D_a1	42
yobi	HR32005XJ

KBRG	3111
mass	0.116
TC-RA	79.284
r min.	0,6 mm
LangID	1
TC-DA2	4.604
Da min	40 mm
TC-SLR	10.5
ALPHA_	16
TC-DA1	5.303
Weight	0,116 Kg
T-ALP22	0
da min.	33 mm
r1 min.	0,6 mm
T-ALP21	32
db max.	30 mm
hidYobi	HR32005XJ
rb max.	0,6 mm
T-ALP23	0
Da max.	42 mm
Oil rpm	11000
GRS rpm	8000
ra max.	0,6 mm
inner r	0.6
Db min.	45 mm
outer r	0.6
inner ra	0.6
hidTable	ecat_NSTPRM
outer rb	0.6
Category	Bearings
TC-BET23	0
TC-BET21	3

TC-BET22	50
Inventory	0.0
Size (mm)	25x47x15
Prod_Type3	TRBSR_MD_A
Width (mm)	15
Product Group	B04334
Bearing number	HR32005XJ
Weight / Kilogram	0.118
Manufacturer Name	NSK
Bore Diameter (mm)	25
Outer Diameter (mm)	47
Minimum Buy Quantity	N/A
Calculation factor (e)	0,43
(Oil) Lubrication Speed	11000 r/min
Calculation factor (Y0)	0,77
(Grease) Lubrication Speed	8000 r/min
Basic dynamic load rating (C)	27,4 kN
Basic static load rating (C0)	33 kN