


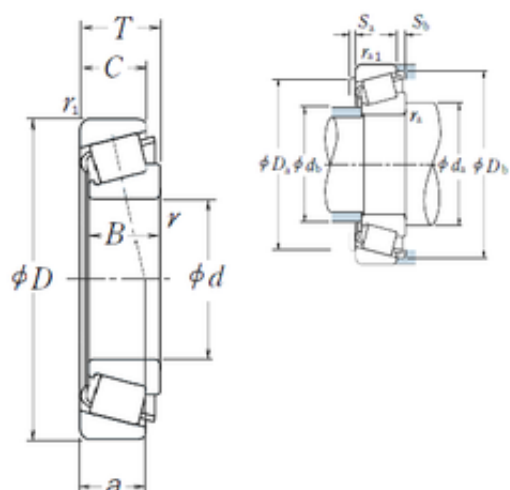

Bearing No. HR32012XJ

D	95 mm
d	60 mm
T	23 mm
B	23 mm
C	17,5 mm
a	20,9 mm
e	0.43
Cr	8700
Y0	0.77
db	66
da	71
Y1	1.4
B_	23
Sb	5.5
C0	127
Sa	4
D_	95
Z_	26
C_	17.5
C0r	12900
DA_	8.355
Iso	4CC
DE_	85.652
D_b	91
DI_	69.357
SBRG	20
SDM_	77.505
D_a2	85
KBRG	3111
yobi	HR32012XJ

D_a1	86
mass	0.608
TC-RA	163.5
r min.	1,5 mm
Weight	0,608 Kg
TC-DA1	8.797
TC-DA2	7.913
TC-SLR	16.5
Da min	85 mm
LangID	1
ALPHA_	16
Db min.	91 mm
Oil rpm	5000
db max.	66 mm
Da max.	86 mm
ra max.	1,5 mm
hidYobi	HR32012XJ
da min.	71 mm
T-ALP21	32
rb max.	1,5 mm
T-ALP22	0
T-ALP23	0
GRS rpm	3600
inner r	1.5
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	3
inner ra	1.5
outer rb	1.5
TC-BET22	5

Size (mm)	60x95x23
Width (mm)	23
Prod_Type3	TRBSR_MD_A
Bearing number	HR32012XJ
Bore Diameter (mm)	60
Outer Diameter (mm)	95
Calculation factor (e)	0,43
Calculation factor (Y0)	0,77
(Oil) Lubrication Speed	5000 r/min
(Grease) Lubrication Speed	3600 r/min
Basic dynamic load rating (C)	85,5 kN
Basic static load rating (C0)	127 kN