


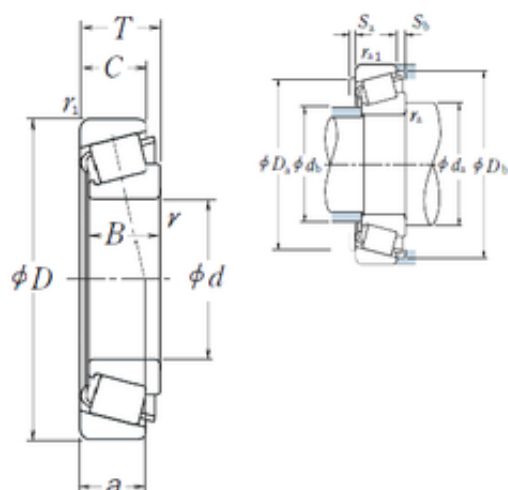

Bearing No. HR32013XJ

a	22,4 mm
e	0.46
d	65 mm
D	100 mm
T	23 mm
B	23 mm
C	17,5 mm
B_	23
da	76
Y0	0.72
C0	132
D_	100
Sb	5.5
Sa	4
db	71
Z_	27
Y1	1.3
C_	17.5
Cr	8800
DE_	90.918
Iso	4CC
DI_	74.641
C0r	13500
DA_	8.355
D_b	97
D_a2	90
SBRG	20
SDM_	82.78
D_a1	91
yobi	HR32013XJ

KBRG	3111
mass	0.646
TC-RA	163.5
r min.	1,5 mm
LangID	1
TC-DA2	7.913
Da min	90 mm
TC-SLR	16.5
ALPHA_	17
TC-DA1	8.797
Weight	0,646 Kg
T-ALP22	0
da min.	76 mm
r1 min.	1,5 mm
T-ALP21	34
db max.	71 mm
hidYobi	HR32013XJ
rb max.	1,5 mm
T-ALP23	0
Da max.	91 mm
Oil rpm	4500
GRS rpm	3400
ra max.	1,5 mm
inner r	1.5
Db min.	97 mm
outer r	1.5
inner ra	1.5
hidTable	ecat_NSTPRM
outer rb	1.5
Category	Bearings
TC-BET23	0
TC-BET21	3

TC-BET22	5
Inventory	0.0
Size (mm)	65x100x23
Prod_Type3	TRBSR_MD_A
Width (mm)	23
Product Group	B04334
Bearing number	HR32013XJ
Weight / Kilogram	0
Manufacturer Name	NSK
Bore Diameter (mm)	65
Outer Diameter (mm)	100
Minimum Buy Quantity	N/A
Calculation factor (e)	0,46
(Oil) Lubrication Speed	4500 r/min
Calculation factor (Y0)	0,72
(Grease) Lubrication Speed	3400 r/min
Basic dynamic load rating (C)	86,5 kN
Basic static load rating (C0)	132 kN