


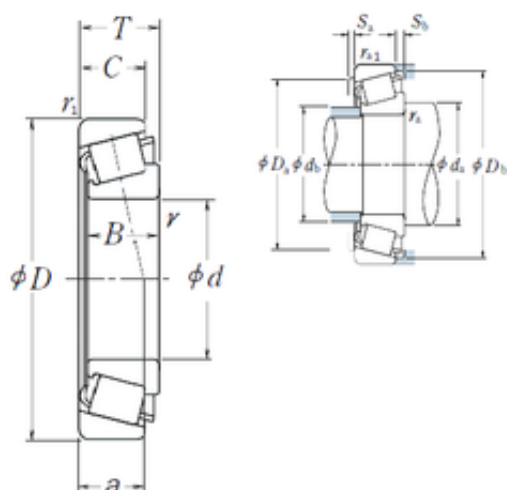

Bearing No. HR32014XJ

a	23,7 mm
e	0.43
d	70 mm
D	110 mm
T	25 mm
B	25 mm
C	19 mm
B_	25
da	81
Y0	0.76
C0	158
D_	110
Sb	6
Sa	5
db	77
Z_	26
Y1	1.4
C_	19
Cr	10600
DE_	99.141
Iso	4CC
DI_	80.693
C0r	16100
DA_	9.468
D_b	105
D_a2	98
SBRG	20
SDM_	89.917
D_a1	101
yobi	HR32014XJ

KBRG	3111
mass	0.869
TC-RA	186.858
r min.	1,5 mm
LangID	1
TC-DA2	8.991
Da min	98 mm
TC-SLR	18
ALPHA_	16.167
TC-DA1	9.945
Weight	0,869 Kg
T-ALP22	20
da min.	81 mm
r1 min.	1,5 mm
T-ALP21	32
db max.	77 mm
hidYobi	HR32014XJ
rb max.	1,5 mm
T-ALP23	0
Da max.	101 mm
Oil rpm	4300
GRS rpm	3200
ra max.	1,5 mm
inner r	1.5
Db min.	105 mm
outer r	1.5
inner ra	1.5
hidTable	ecat_NSTPRM
outer rb	1.5
Category	Bearings
TC-BET23	0
TC-BET21	3

TC-BET22	3
Inventory	0.0
Size (mm)	70x110x25
Prod_Type3	TRBSR_MD_A
Width (mm)	25
Product Group	B04334
Bearing number	HR32014XJ
Weight / Kilogram	0
Manufacturer Name	NSK
Bore Diameter (mm)	70
Outer Diameter (mm)	110
Minimum Buy Quantity	N/A
Calculation factor (e)	0,43
(Oil) Lubrication Speed	4300 r/min
Calculation factor (Y0)	0,76
(Grease) Lubrication Speed	3200 r/min
Basic dynamic load rating (C)	104 kN
Basic static load rating (C0)	158 kN