


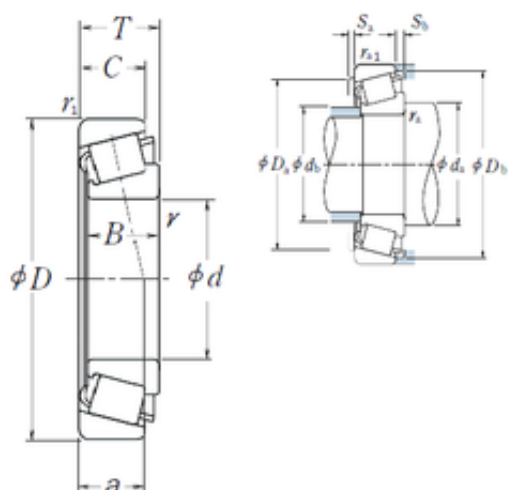

Bearing No. HR32015XJ

D	115 mm
d	75 mm
T	25 mm
B	25 mm
C	19 mm
a	25,1 mm
e	0.46
Cr	11100
Y0	0.72
db	82
da	86
Y1	1.3
B_	25
Sb	6
C0	171
Sa	5
D_	115
Z_	28
C_	19
C0r	17400
DA_	9.468
Iso	4CC
DE_	104.167
D_b	110
DI_	85.718
SBRG	20
SDM_	94.943
D_a2	103
KBRG	3111
yobi	HR32015XJ

D_a1	106
mass	0.925
TC-RA	186.858
r min.	1,5 mm
Weight	0,925 Kg
TC-DA1	9.945
TC-DA2	8.991
TC-SLR	18
Da min	103 mm
LangID	1
ALPHA_	17
Db min.	110 mm
Oil rpm	4000
db max.	82 mm
Da max.	106 mm
ra max.	1,5 mm
hidYobi	HR32015XJ
da min.	86 mm
T-ALP21	34
rb max.	1,5 mm
T-ALP22	0
T-ALP23	0
GRS rpm	3000
inner r	1.5
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	3
inner ra	1.5
outer rb	1.5
TC-BET22	3

Size (mm)	75x115x25
Width (mm)	25
Prod_Type3	TRBSR_MD_A
Bearing number	HR32015XJ
Bore Diameter (mm)	75
Outer Diameter (mm)	115
Calculation factor (e)	0,46
Calculation factor (Y0)	0,72
(Oil) Lubrication Speed	4000 r/min
(Grease) Lubrication Speed	3000 r/min
Basic dynamic load rating (C)	109 kN
Basic static load rating (C0)	171 kN