


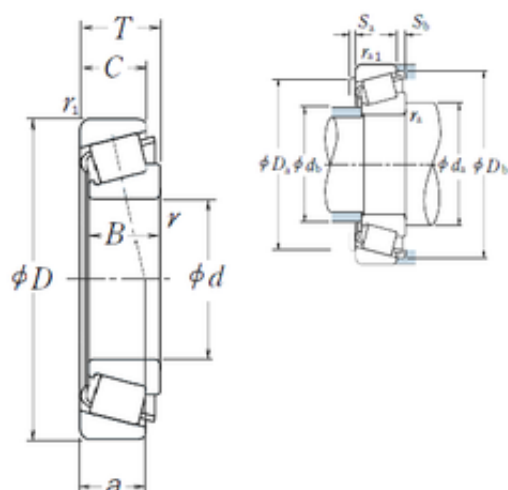

Bearing No. HR32017XJ

D	130 mm
d	85 mm
T	29 mm
B	29 mm
C	22 mm
a	28,2 mm
e	0.44
Cr	14600
Y0	0.75
db	94
da	96
Y1	1.4
B_	29
Sb	7
C0	231
Sa	6
D_	130
Z_	28
C_	22
C0r	23600
DA_	10.64
Iso	4CC
DE_	118.27
D_b	125
DI_	97.54
SBRG	20
SDM_	107.905
D_a2	116
KBRG	3111
yobi	HR32017XJ

D_a1	121
mass	1.38
TC-RA	219.758
r min.	1,5 mm
Weight	1,38 Kg
TC-DA1	11.185
TC-DA2	10.095
TC-SLR	21.5
Da min	116 mm
LangID	1
ALPHA_	16.417
Db min.	125 mm
Oil rpm	3600
db max.	94 mm
Da max.	121 mm
ra max.	1,5 mm
hidYobi	HR32017XJ
da min.	96 mm
T-ALP21	32
rb max.	1,5 mm
T-ALP22	50
T-ALP23	0
GRS rpm	2600
inner r	1.5
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	2
inner ra	1.5
outer rb	1.5
TC-BET22	55

Size (mm)	85x130x29
Width (mm)	29
Prod_Type3	TRBSR_MD_A
Bearing number	HR32017XJ
Bore Diameter (mm)	85
Outer Diameter (mm)	130
Calculation factor (e)	0,44
Calculation factor (Y0)	0,75
(Oil) Lubrication Speed	3600 r/min
(Grease) Lubrication Speed	2600 r/min
Basic dynamic load rating (C)	143 kN
Basic static load rating (C0)	231 kN