


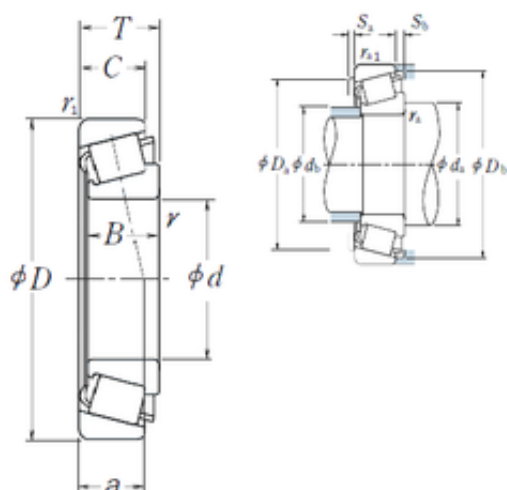

Bearing No. HR32018XJ

a	29,7 mm
e	0.42
d	90 mm
D	140 mm
T	32 mm
B	32 mm
C	24 mm
B_	32
da	102
Y0	0.78
C0	273
D_	140
Sb	8
Sa	6
db	99
Z_	27
Y1	1.4
C_	24
Cr	17300
DE_	126.717
Iso	3CC
DI_	103.557
C0r	27800
DA_	11.874
D_b	134
D_a2	124
SBRG	20
SDM_	115.137
D_a1	131
yobi	HR32018XJ

KBRG	3111
mass	1.78
TC-RA	245
r min.	2 mm
LangID	1
TC-DA2	11.278
Da min	124 mm
TC-SLR	23.5
ALPHA_	15.75
TC-DA1	12.47
Weight	1,78 Kg
T-ALP22	30
da min.	102 mm
r1 min.	1,5 mm
T-ALP21	31
db max.	99 mm
hidYobi	HR32018XJ
rb max.	1,5 mm
T-ALP23	0
Da max.	131 mm
Oil rpm	3200
GRS rpm	2400
ra max.	2 mm
inner r	2
Db min.	134 mm
outer r	1.5
inner ra	2
hidTable	ecat_NSTPRM
outer rb	1.5
Category	Bearings
TC-BET23	0
TC-BET21	2

TC-BET22	55
Inventory	0.0
Size (mm)	90x140x32
Prod_Type3	TRBSR_MD_A
Width (mm)	32
Product Group	B04334
Bearing number	HR32018XJ
Weight / Kilogram	0
Manufacturer Name	NSK
Bore Diameter (mm)	90
Outer Diameter (mm)	140
Minimum Buy Quantity	N/A
Calculation factor (e)	0,42
(Oil) Lubrication Speed	3200 r/min
Calculation factor (Y0)	0,78
(Grease) Lubrication Speed	2400 r/min
Basic dynamic load rating (C)	170 kN
Basic static load rating (C0)	273 kN