


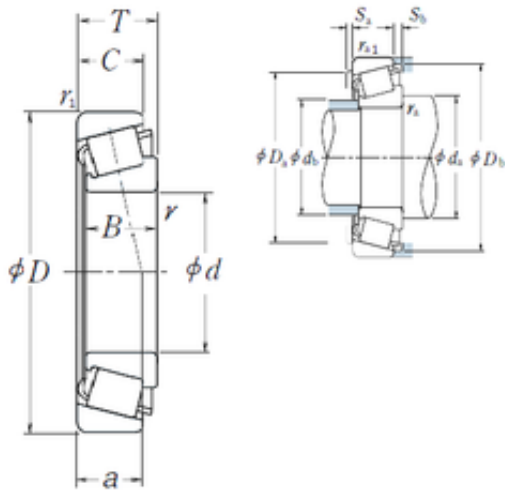

Bearing No. HR32019XJ

D	145 mm
d	95 mm
T	32 mm
B	32 mm
C	24 mm
a	31,2 mm
e	0.44
Cr	17600
Y0	0.75
db	104
da	107
Y1	1.4
B_	32
Sb	8
C0	283
Sa	6
D_	145
Z_	28
C_	24
C0r	28900
DA_	11.874
Iso	4CC
DE_	131.998
D_b	140
DI_	108.857
SBRG	20
SDM_	120.428
D_a2	131
KBRG	3111
yobi	HR32019XJ

D_a1	136
mass	1.88
TC-RA	245
r min.	2 mm
Weight	1,88 Kg
TC-DA1	12.47
TC-DA2	11.278
TC-SLR	23.5
Da min	131 mm
LangID	1
ALPHA_	16.417
Db min.	140 mm
Oil rpm	3200
db max.	104 mm
Da max.	136 mm
ra max.	2 mm
hidYobi	HR32019XJ
da min.	107 mm
T-ALP21	32
rb max.	1,5 mm
T-ALP22	50
T-ALP23	0
GRS rpm	2400
inner r	2
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	2
inner ra	2
outer rb	1.5
TC-BET22	55

Size (mm)	95x145x32
Width (mm)	32
Prod_Type3	TRBSR_MD_A
Bearing number	HR32019XJ
Bore Diameter (mm)	95
Outer Diameter (mm)	145
Calculation factor (e)	0,44
Calculation factor (Y0)	0,75
(Oil) Lubrication Speed	3200 r/min
(Grease) Lubrication Speed	2400 r/min
Basic dynamic load rating (C)	173 kN
Basic static load rating (C0)	283 kN