


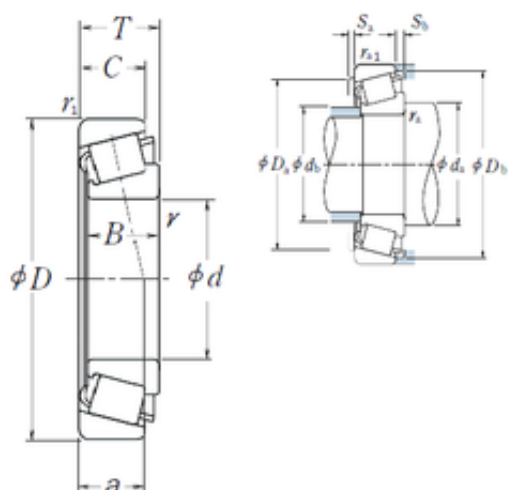

Bearing No. HR32026XJ

D	200 mm
d	130 mm
T	45 mm
B	45 mm
C	34 mm
a	43,9 mm
e	0.43
Cr	32500
Y0	0.76
db	144
da	145
Y1	1.4
B_	45
Sb	11
C0	535
Sa	8
D_	200
Z_	26
C_	34
C0r	54500
DA_	17.133
Iso	4EC
DE_	181.9
D_b	192
DI_	148.938
SBRG	20
SDM_	165.419
D_a2	179
KBRG	3111
yobi	HR32026XJ

D_a1	190
mass	5.06
TC-RA	343.7
r min.	2,5 mm
Weight	5,06 Kg
TC-DA1	17.993
TC-DA2	16.272
TC-SLR	33
Da min	179 mm
LangID	1
ALPHA_	16.167
Db min.	192 mm
Oil rpm	2200
db max.	144 mm
Da max.	190 mm
ra max.	2 mm
hidYobi	HR32026XJ
da min.	145 mm
T-ALP21	32
rb max.	2 mm
T-ALP22	20
T-ALP23	0
GRS rpm	1600
inner r	2.5
outer r	2
r1 min.	2 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	3
inner ra	2
outer rb	2
TC-BET22	0

Size (mm)	130x200x45
Width (mm)	45
Prod_Type3	TRBSR_MD_A
Bearing number	HR32026XJ
Bore Diameter (mm)	130
Outer Diameter (mm)	200
Calculation factor (e)	0,43
Calculation factor (Y0)	0,76
(Oil) Lubrication Speed	2200 r/min
(Grease) Lubrication Speed	1600 r/min
Basic dynamic load rating (C)	320 kN
Basic static load rating (C0)	535 kN