


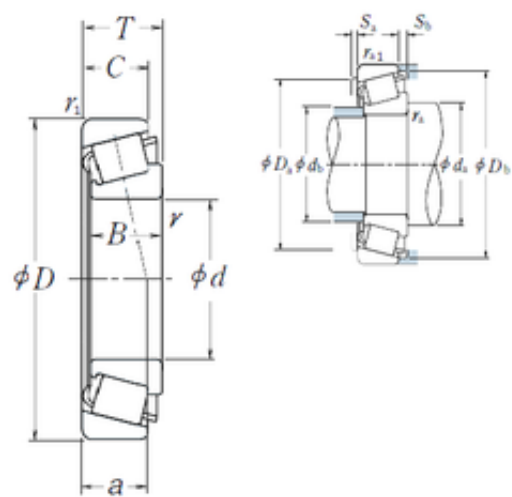

Bearing No. HR31315J

D	160 mm
d	75 mm
T	40 mm
B	37 mm
C	26 mm
a	48,7 mm
e	0.83
Cr	21500
Y0	0.4
db	91
da	99
Y1	0.73
B_	37
Sb	14
C0	251
Sa	6
D_	160
Z_	16
C_	26
C0r	25600
DA_	20.773
Iso	7GB
DE_	136.422
D_b	152
DI_	97.093
SBRG	3
SDM_	116.758
D_a2	129
KBRG	3111
yobi	HR31315J

D_a1	148
mass	3.47
TC-RA	152.502
r min.	3 mm
Weight	3,47 Kg
TC-DA1	22.596
TC-DA2	18.95
TC-SLR	25
Da min	129 mm
LangID	1
ALPHA_	28.811
Db min.	152 mm
Oil rpm	3000
db max.	91 mm
Da max.	148 mm
ra max.	2,5 mm
hidYobi	HR31315J
da min.	99 mm
T-ALP21	57
rb max.	2 mm
T-ALP22	37
T-ALP23	18
GRS rpm	2200
inner r	3
outer r	2.5
r1 min.	2,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	8
inner ra	2.5
outer rb	2
TC-BET22	30

Size (mm)	75x160x40
Width (mm)	40
Prod_Type3	TRBSR_MD_A
Bearing number	HR31315J
Bore Diameter (mm)	75
Outer Diameter (mm)	160
Calculation factor (e)	0,83
Calculation factor (Y0)	0,4
(Oil) Lubrication Speed	3000 r/min
(Grease) Lubrication Speed	2200 r/min
Basic dynamic load rating (C)	211 kN
Basic static load rating (C0)	251 kN