


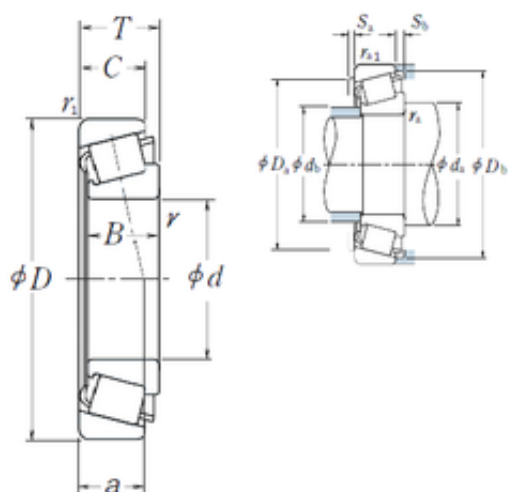

Bearing No. HR31319J

D	200 mm
d	95 mm
T	49,5 mm
B	45 mm
C	32 mm
a	61,9 mm
e	0.83
Cr	31500
Y0	0.4
db	115
da	123
Y1	0.73
B_	45
Sb	17.5
C0	375
Sa	6
D_	200
Z_	16
C_	32
C0r	38500
DA_	25.966
Iso	7GB
DE_	169.184
D_b	187
DI_	121.439
SBRG	3
SDM_	145.312
D_a2	158
KBRG	3111
yobi	HR31319J

D_a1	186
mass	6.64
TC-RA	190
r min.	4 mm
Weight	6,64 Kg
TC-DA1	28.152
TC-DA2	23.78
TC-SLR	30
Da min	158 mm
LangID	1
ALPHA_	28.811
Db min.	187 mm
Oil rpm	2400
db max.	115 mm
Da max.	186 mm
ra max.	3 mm
hidYobi	HR31319J
da min.	123 mm
T-ALP21	57
rb max.	2,5 mm
T-ALP22	37
T-ALP23	18
GRS rpm	1700
inner r	4
outer r	3
r1 min.	3 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	8
inner ra	3
outer rb	2.5
TC-BET22	30

Size (mm)	95x200x49.5
Width (mm)	49,5
Prod_Type3	TRBSR_MD_A
Bearing number	HR31319J
Bore Diameter (mm)	95
Outer Diameter (mm)	200
Calculation factor (e)	0,83
Calculation factor (Y0)	0,4
(Oil) Lubrication Speed	2400 r/min
(Grease) Lubrication Speed	1700 r/min
Basic dynamic load rating (C)	310 kN
Basic static load rating (C0)	375 kN