


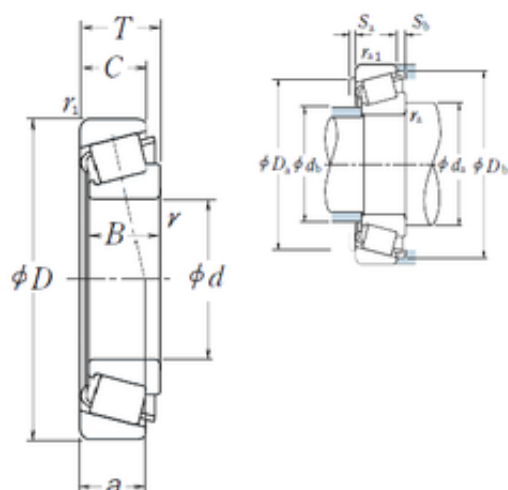

Bearing No. HR31321J

D	225 mm
d	105 mm
T	58 mm
B	53 mm
C	36 mm
a	70,2 mm
e	0.83
Cr	42000
Y0	0.4
db	130
da	141
Y1	0.73
B_	53
Sb	22
C0	540
Sa	7
D_	225
Z_	17
C_	36
C0r	55000
DA_	28.155
Iso	7GB
DE_	190.524
D_b	211
DI_	139.179
SBRG	13
SDM_	164.852
D_a2	177
KBRG	3111
yobi	HR31321J

D_a1	211
mass	10
TC-RA	216
r min.	4 mm
Weight	10 Kg
TC-DA1	30.752
TC-DA2	25.557
TC-SLR	37
Da min	177 mm
LangID	1
ALPHA_	28.811
Db min.	211 mm
Oil rpm	2000
db max.	130 mm
Da max.	211 mm
ra max.	3 mm
hidYobi	HR31321J
da min.	141 mm
T-ALP21	57
rb max.	2,5 mm
T-ALP22	37
T-ALP23	18
GRS rpm	1500
inner r	4
outer r	3
r1 min.	3 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	8
inner ra	3
outer rb	2.5
TC-BET22	10

Size (mm)	105x225x58
Width (mm)	58
Prod_Type3	TRBSR_MD_A
Bearing number	HR31321J
Bore Diameter (mm)	105
Outer Diameter (mm)	225
Calculation factor (e)	0,83
Calculation factor (Y0)	0,4
(Oil) Lubrication Speed	2000 r/min
(Grease) Lubrication Speed	1500 r/min
Basic dynamic load rating (C)	415 kN
Basic static load rating (C0)	540 kN