


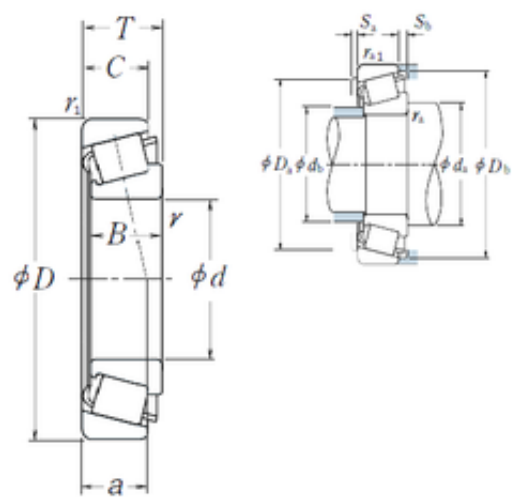

Bearing No. HR31322J

D	240 mm
d	110 mm
T	63 mm
B	57 mm
C	38 mm
a	74,7 mm
e	0.83
Cr	48000
Y0	0.4
db	136
da	146
Y1	0.73
B_	57
Sb	25
C0	605
Sa	7
D_	240
Z_	16
C_	38
C0r	62000
DA_	31.233
Iso	7GB
DE_	202.914
D_b	224
DI_	146.074
SBRG	13
SDM_	174.494
D_a2	191
KBRG	3111
yobi	HR31322J

D_a1	226
mass	12.3
TC-RA	230.5
r min.	4 mm
Weight	12,3 Kg
TC-DA1	34.153
TC-DA2	28.313
TC-SLR	40
Da min	191 mm
LangID	1
ALPHA_	28.811
Db min.	224 mm
Oil rpm	1900
db max.	136 mm
Da max.	226 mm
ra max.	3 mm
hidYobi	HR31322J
da min.	146 mm
T-ALP21	57
rb max.	2,5 mm
T-ALP22	37
T-ALP23	18
GRS rpm	1400
inner r	4
outer r	3
r1 min.	3 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	8
inner ra	3
outer rb	2.5
TC-BET22	30

Size (mm)	110x240x63
Width (mm)	63
Prod_Type3	TRBSR_MD_A
Bearing number	HR31322J
Bore Diameter (mm)	110
Outer Diameter (mm)	240
Calculation factor (e)	0,83
Calculation factor (Y0)	0,4
(Oil) Lubrication Speed	1900 r/min
(Grease) Lubrication Speed	1400 r/min
Basic dynamic load rating (C)	470 kN
Basic static load rating (C0)	605 kN