


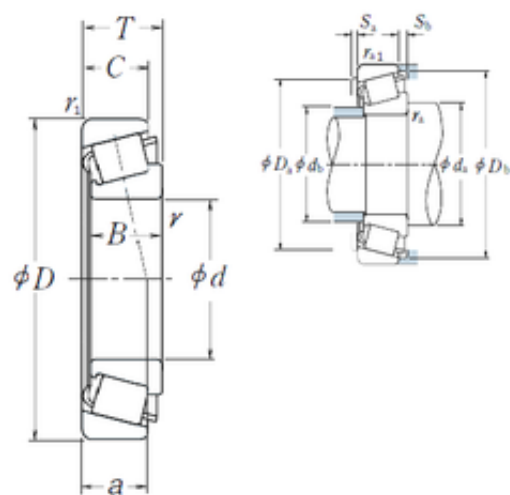

Bearing No. HR31330J

D	320 mm
d	150 mm
T	82 mm
B	75 mm
C	50 mm
a	99,3 mm
e	0.83
Cr	80500
Y0	0.4
db	187
da	194
Y1	0.73
B_	75
Sb	32
C0	1100
Sa	9
D_	320
Z_	17
C_	50
C0r	112000
DA_	39.32
Iso	7GB
DE_	271.744
D_b	300
DI_	199.955
SBRG	13
SDM_	235.85
D_a2	253
KBRG	3111
yobi	HR31330J

D_a1	302
mass	28.5
TC-RA	308.321
r min.	5 mm
Weight	28,5 Kg
TC-DA1	43.002
TC-DA2	35.638
TC-SLR	53.5
Da min	253 mm
LangID	1
ALPHA_	28.811
Db min.	300 mm
Oil rpm	1400
db max.	187 mm
Da max.	302 mm
ra max.	4 mm
hidYobi	HR31330J
da min.	194 mm
T-ALP21	57
rb max.	3 mm
T-ALP22	37
T-ALP23	18
GRS rpm	1000
inner r	5
outer r	4
r1 min.	4 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	8
inner ra	4
outer rb	3
TC-BET22	0

Size (mm)	150x320x82
Width (mm)	82
Prod_Type3	TRBSR_MD_A
Bearing number	HR31330J
Bore Diameter (mm)	150
Outer Diameter (mm)	320
Calculation factor (e)	0,83
Calculation factor (Y0)	0,4
(Oil) Lubrication Speed	1400 r/min
(Grease) Lubrication Speed	1000 r/min
Basic dynamic load rating (C)	790 kN
Basic static load rating (C0)	1100 kN