


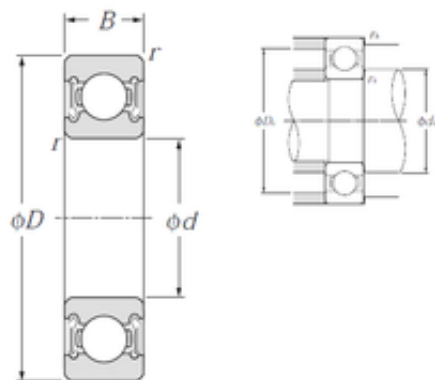

Bearing No. 6008LLB

D	68 mm
d	40 mm
B	15 mm
C	15 mm
Noun	Bearing
Bore	1.575 Inch 40 Millimeter
da max	47 mm
Weight	0,19 Kg
UNSPSC	31171504
r min.	1 mm
da min.	45 mm
Da max.	63 mm
series:	60
ra max.	1 mm
Category	Single Row Ball Bearing
Enclosure	2 Seals
Snap Ring	No
Inventory	0.0
Size (mm)	40x68x15
Width (mm)	15
bore type:	Round
Weight / LBS	0.41
maximum rpm:	6100 RPM
closure type:	Double Sealed
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
Keyword String	Ball
Other Features	Deep Groove Non-Friction Nitrile Rubber

	Seal
Enclosure Type	Non-Contact Seal
Bearing number	6008LLB
overall width:	15 mm
bore diameter:	40 mm
cage material:	Steel
fillet radius:	1 mm
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
finish/coating:	Uncoated
Outer Race Width	0.591 Inch 15 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	2.677 Inch 68 Millimeter
Long Description	40MM Bore; 68MM Outside Diameter; 15MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Manufacturer URL	http://www.ntnamerica.com
bearing material:	High Carbon Chrome Steel
outside diameter:	68 mm
inner ring width:	15 mm
Manufacturer Name	NTN
Weight / Kilogram	0.186
outer ring width:	15 mm
precision rating:	ISO Class 0
Bore Diameter (mm)	40

Internal Clearance	C0-Medium
snap ring included:	Without Snap Ring
Outer Diameter (mm)	68
internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	11500 N
maximum rpm (grease):	10000 rpm
row type & fill slot:	Single Row Non-Fill Slot
dynamic load capacity:	16800 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6008LLB
Internal Special Features	No
manufacturer product page:	Click here
(Grease) Lubrication Speed	10 000 r/min
operating temperature range:	-40 to 120 °C
Basic dynamic load rating (C)	16,8 kN
Basic static load rating (C0)	11,5 kN
Maximum Capacity / Filling Slot	No