


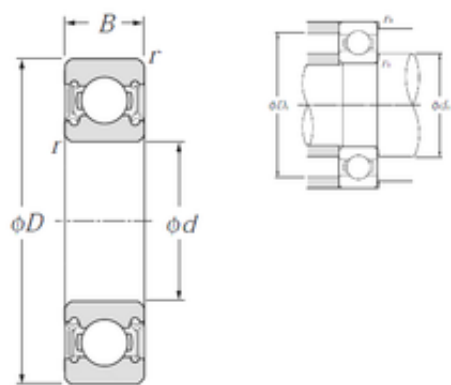

Bearing No. 6008LLU

D	68 mm
d	40 mm
B	15 mm
C	15 mm
Noun	Bearing
Bore	1.575 Inch 40 Millimeter
da max	47 mm
UNSPSC	31171504
r min.	1 mm
Weight	0,19 Kg
da min.	45 mm
Da max.	63 mm
ra max.	1 mm
Category	Single Row Ball Bearing
Inventory	0.0
Enclosure	2 Seals
Size (mm)	40x68x15
Snap Ring	No
bore type:	Round
Width (mm)	15
Weight / LBS	0.411
Inch - Metric	Metric
closure type:	Double Sealed
Product Group	B00308
Cage Material	Steel
Other Features	Deep Groove Double Lip Friction Nitrile Rubber Seal -20 To 120 Deg C Shell Alvania Prelubricated
bore diameter:	40 mm

Keyword String	Ball
overall width:	15 mm
cage material:	Steel
fillet radius:	1 mm
Bearing number	6008LLU
Enclosure Type	Contact Seal
Rolling Element	Ball Bearing
Reference speed	6 100 r/min
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	2.677 Inch 68 Millimeter
Outer Race Width	0.591 Inch 15 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Long Description	40MM Bore; 68MM Outside Diameter; 15MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
outer ring width:	15 mm
inner ring width:	15 mm
bearing material:	High Carbon Chrome Steel
precision rating:	ISO Class 0
Weight / Kilogram	0.186
Manufacturer Name	NTN
outside diameter:	68 mm
Bore Diameter (mm)	40
Internal Clearance	C0-Medium

snap ring included:	Without Snap Ring
Outer Diameter (mm)	68
internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	11500 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	6100 rpm
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	16800 N
Manufacturer Item Number	6008LLU/2AS
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	11,5 kN
Basic dynamic load rating (C)	16,8 kN
Maximum Capacity / Filling Slot	No