


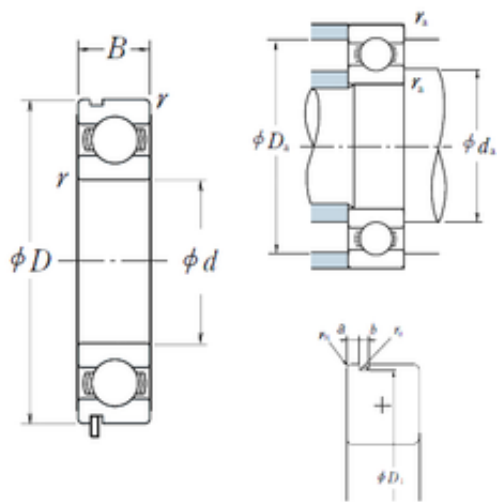

Bearing No. 6008N

a	2,49 mm
r	1
d	40 mm
D	68 mm
B	15 mm
C	15 mm
b	1,9 mm
fo	15.3
B_	15
ra	1
C0	11.5
D1	64,82 mm
D_	68
Z_	12
rn	0,5 mm
ro	0.6
DE_	62.438
SRI	4.11
D_a	63
DA_	7.938
SRE	4.11
DI_	46.562
yobi	6008N
mass	0.19
SBRG	10
bomp	0
KBRG	6101
SREX	0.02
SREN	-0.02
SRIN	-0.02

SDM_	54.5
SRIX	0.02
ALPHA_	0
r min.	1 mm
C_conv	16800
da max	47,5 mm
da min	45
Weight	0,19 Kg
LangID	1
ra max.	1 mm
Da max.	63 mm
Oil rpm	12000
da min.	45 mm
r0 max.	0,6 mm
hidYobi	6008N
GRS rpm	10000
hidTable	ecat_NSRDGB
Size (mm)	40x68x15
Prod_Type3	DGBB_SR_N_OT
Width (mm)	15
Bearing number	6008N
Bore Diameter (mm)	40
Outer Diameter (mm)	68
(Oil) Lubrication Speed	12 000 r/min
(Grease) Lubrication Speed	10 000 r/min
Basic dynamic load rating (C)	16,8 kN
Basic static load rating (C0)	11,5 kN