


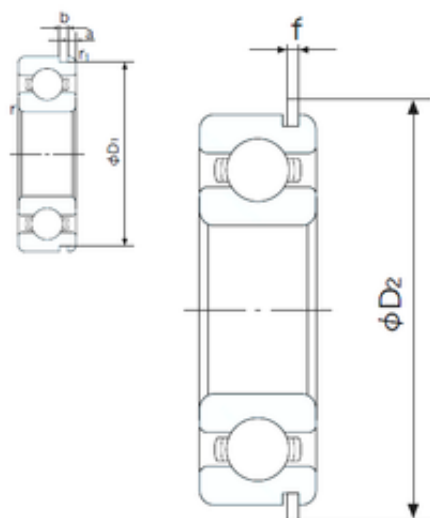

Bearing No. 6008NR

D	68 mm
d	40 mm
B	15 mm
C	15 mm
a	2.49 mm
b	1.9 mm
f	1.7 mm
D1	64.82 mm
r1	0.5 mm
D2	74.6 mm
Width	15 mm
UNSPSC	31171504
Weight	0.186 Kg
r min.	1 mm
r1 min.	0.5 mm
b (min)	1.9 mm
a (max)	2.5 mm
Da (max)	63 mm
da (min)	45 mm
Category	Ball Bearings
Dx (min)	76 mm
ra (max)	1 mm
D1 (max)	64.8 mm
Cy (max)	3.8 mm
Factor fo	15.3
Inventory	0.0
Size (mm)	40x68x15
Bore Type	Cylindrical Bore
Enclosure	Snap Ring Groove with Snap Ring

Bore Size	40 mm
Width (mm)	15
Product Group	B00308
Configuration	Single Row
Bearing number	6008NR
Snap Ring Width	1.7 mm
Radial Clearance	0.006 to 0.020 mm
Outside Diameter	68 mm
Weight / Kilogram	0.195
Manufacturer Name	NACHI
Bore Diameter (mm)	40
Static Load Rating	11,500 N
Dynamic Load Rating	16,800 N
Outer Diameter (mm)	68
Minimum Buy Quantity	N/A
Limiting Speed - Oil	12,000 rpm
Fillet Radius/Chamfer	1 mm
Limiting Speed - Grease	10,000 rpm
(Grease) Lubrication Speed	9500 r/min
Snap Ring Outside Diameter	74.6 mm
Basic static load rating (C0)	11,5 kN
Basic dynamic load rating (C)	16,8 kN