


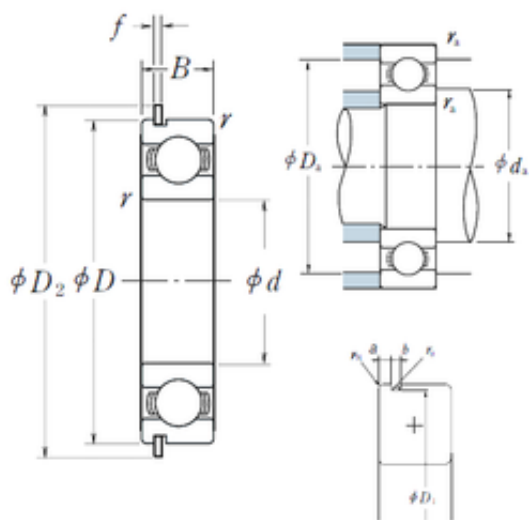

Bearing No. 6008NR

f	1,7 mm
r	1
d	40 mm
D	68 mm
B	15 mm
C	15 mm
a	2,49 mm
b	1,9 mm
D1	64,82 mm
fo	15.3
C0	11.5
ra	1
D2	74,6 mm
B_	15
Cy	3.8
Dx	76
rn	0,5 mm
ro	0.6
D_	68
Z_	12
SRE	4.11
D_a	63
SRI	4.11
DE_	62.438
DA_	7.938
DI_	46.562
bomp	0
SREX	0.02
yobi	6008NR
SBRG	10

KBRG	6101
SDM_	54.5
mass	0.19
SRIX	0.02
Bore	1.575 Inch 40 Millimeter
SRIN	-0.02
SREN	-0.02
Noun	Bearing
UNSPSC	31171504
LangID	1
r min.	1 mm
da max	47,5 mm
C_conv	16800
ALPHA_	0
Weight	0,19 Kg
da min	45
ra max.	1 mm
Da max.	63 mm
hidYobi	6008NR
Oil rpm	12000
da min.	45 mm
GRS rpm	10000
r0 max.	0,6 mm
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Snap Ring	Yes
Size (mm)	40x68x15
Inventory	0.0
Enclosure	Open
bore type:	Round
Width (mm)	15
Prod_Type3	DGBB_SR_NR_OT

Weight / LBS	0.195
closure type:	Open
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
Bearing number	6008NR
Keyword String	Ball
bore diameter:	40 mm
overall width:	15 mm
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Outer Race Width	0.591 Inch 15 Millimeter
Outside Diameter	2.677 Inch 68 Millimeter
Long Description	40MM Bore; 68MM Outside Diameter; 15MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
outside diameter:	68 mm
Weight / Kilogram	0.19
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	40
Outer Diameter (mm)	68
internal clearance:	Normal Clearance
snap ring included:	With Snap Ring
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68

(Oil) Lubrication Speed	12 000 r/min
manufacturer upc number:	029176012839
Manufacturer Item Number	6008NR
Internal Special Features	No
(Grease) Lubrication Speed	10 000 r/min
Basic static load rating (C0)	11,5 kN
Basic dynamic load rating (C)	16,8 kN
Maximum Capacity / Filling Slot	No