


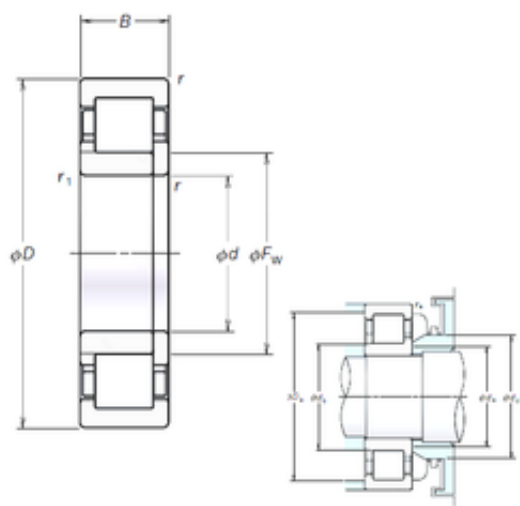

Bearing No. NUP2226EM

|        |           |
|--------|-----------|
| S      | 3 mm      |
| D      | 230 mm    |
| r      | 3         |
| C      | 64 mm     |
| B      | 64 mm     |
| d      | 130 mm    |
| Fw     | 153,5 mm  |
| D_     | 230       |
| rb     | 2.5       |
| B_     | 64        |
| ra     | 2.5       |
| C0     | 735       |
| r1     | 3         |
| da     | 143       |
| Z_     | 17        |
| DE_    | 209.5     |
| DA_    | 28        |
| DI_    | 153.5     |
| mass   | 12.1      |
| SDM_   | 181.5     |
| SBRG   | 22        |
| yobi   | NUP2226EM |
| KBRG   | 4165      |
| LangID | 1         |
| r min. | 3 mm      |
| db max | 150       |
| dd min | 168       |
| Db max | 217 mm    |
| ALPHA_ | 0         |
| db min | 143 mm    |
|        |           |

|                               |             |
|-------------------------------|-------------|
| C_conv                        | 530000      |
| Weight                        | 9,44 Kg     |
| dc min                        | 158         |
| TSR rpm                       | 3400        |
| D_a max                       | 217         |
| GRS rpm                       | 2400        |
| hidYobi                       | NUP2226EM   |
| Oil rpm                       | 3000        |
| ra max.                       | 2,5 mm      |
| r1 min.                       | 3 mm        |
| da min.                       | 143 mm      |
| Da max.                       | 217 mm      |
| db max.                       | 150 mm      |
| rb max.                       | 2,5 mm      |
| Category                      | Bearings    |
| hidTable                      | ecat_NSCLDR |
| Macha rpm                     | 4500        |
| Size (mm)                     | 130x230x64  |
| Inventory                     | 0.0         |
| Width (mm)                    | 64          |
| Prod_Type3                    | CRB_SR_NUP  |
| Product Group                 | B04144      |
| Bearing number                | NUP2226EM   |
| Manufacturer Name             | NSK         |
| Weight / Kilogram             | 9.44        |
| Bore Diameter (mm)            | 130         |
| Outer Diameter (mm)           | 230         |
| Minimum Buy Quantity          | N/A         |
| (Grease) Lubrication Speed    | 2400 r/min  |
| Basic dynamic load rating (C) | 530 kN      |
| Basic static load rating      | 735 kN      |

|      |  |
|------|--|
| (C0) |  |
|------|--|