


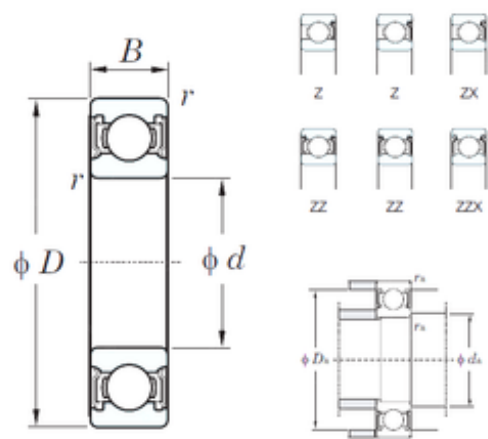

Bearing No. 6008ZZ

|                  |                                                             |
|------------------|-------------------------------------------------------------|
| D                | 68 mm                                                       |
| d                | 40 mm                                                       |
| B                | 15 mm                                                       |
| C                | 15 mm                                                       |
| Bore             | 1.575 Inch   40 Millimeter                                  |
| Noun             | Bearing                                                     |
| r min.           | 1 mm                                                        |
| da max           | 46,5 mm                                                     |
| UNSPSC           | 31171504                                                    |
| Weight           | 0,192 Kg                                                    |
| ra max.          | 1 mm                                                        |
| Da max.          | 63 mm                                                       |
| da min.          | 45 mm                                                       |
| Category         | Single Row Ball Bearing                                     |
| Enclosure        | 2 Metal Shields                                             |
| Inventory        | 0.0                                                         |
| Size (mm)        | 40x68x15                                                    |
| Snap Ring        | No                                                          |
| Width (mm)       | 15                                                          |
| Weight / LBS     | 0.42329                                                     |
| Inch - Metric    | Metric                                                      |
| Cage Material    | Steel                                                       |
| Product Group    | B00308                                                      |
| Other Features   | Deep Groove                                                 |
| Bearing number   | 6008ZZ                                                      |
| Keyword String   | Ball                                                        |
| Precision Class  | ABEC 1   ISO P0                                             |
| Rolling Element  | Ball Bearing                                                |
| Manufacturer URL | <a href="http://www.koyousa.com">http://www.koyousa.com</a> |
|                  |                                                             |

|                                    |                                                                                                                                                                                                                                     |
|------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Outer Race Width                   | 0.591 Inch   15<br>Millimeter                                                                                                                                                                                                       |
| Inner Race Width                   | 0 Inch   0 Millimeter                                                                                                                                                                                                               |
| Long Description                   | 40MM Bore; 68MM<br>Outside Diameter;<br>15MM Outer Race<br>Width; 2 Metal Shields;<br>Ball Bearing; ABEC 1  <br>ISO P0; No Filling Slot;<br>No Snap Ring; No<br>Internal Special<br>Features; C0-Medium<br>Internal Clearance; Stee |
| Outside Diameter                   | 2.677 Inch   68<br>Millimeter                                                                                                                                                                                                       |
| Manufacturer Name                  | KOYO                                                                                                                                                                                                                                |
| Weight / Kilogram                  | 0.211                                                                                                                                                                                                                               |
| Internal Clearance                 | C0-Medium                                                                                                                                                                                                                           |
| Bore Diameter (mm)                 | 40                                                                                                                                                                                                                                  |
| Outer Diameter (mm)                | 68                                                                                                                                                                                                                                  |
| Minimum Buy Quantity               | N/A                                                                                                                                                                                                                                 |
| Harmonized Tariff Code             | 8482.10.50.68                                                                                                                                                                                                                       |
| Internal Special<br>Features       | No                                                                                                                                                                                                                                  |
| (Grease) Lubrication<br>Speed      | 10000 r/min                                                                                                                                                                                                                         |
| Basic static load rating<br>(C0)   | 11,5 kN                                                                                                                                                                                                                             |
| Basic dynamic load<br>rating (C)   | 16,7 kN                                                                                                                                                                                                                             |
| Maximum Capacity /<br>Filling Slot | No                                                                                                                                                                                                                                  |