


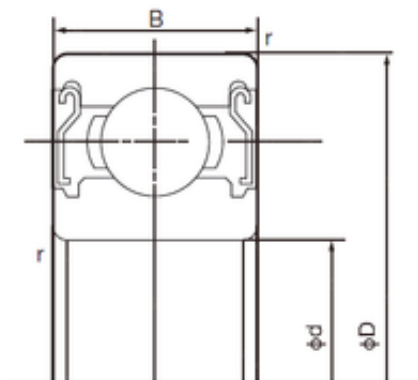

Bearing No. 6008ZZE

D	68 mm
d	40 mm
B	15 mm
C	15 mm
Noun	Bearing
Bore	1.575 Inch 40 Millimeter
Width	15 mm
UNSPSC	31171504
r min.	1.0 mm
Weight	0.194 Kg
da min.	45 mm
Da max.	63 mm
ra max.	1.0 mm
Category	Single Row Ball Bearing
ra (max)	1 mm
da (min)	45 mm
Da (max)	63 mm
Size (mm)	40x68x15
Snap Ring	No
Enclosure	2 Metal Shields
Bore Size	40 mm
Bore Type	Cylindrical Bore
Inventory	0.0
Factor fo	15.3
Width (mm)	15
Weight / LBS	0.4541
Product Group	B00308
Configuration	Single Row
Cage Material	Steel

Inch - Metric	Metric
Keyword String	Ball
Other Features	Deep Groove
Bearing number	6008ZZE
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Long Description	40MM Bore; 68MM Outside Diameter; 15MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Stee
Inner Race Width	0 Inch 0 Millimeter
Radial Clearance	0.006 to 0.020 mm
Outer Race Width	0.591 Inch 15 Millimeter
Manufacturer URL	http://www.nachiamerica.com
Outside Diameter	2.677 Inch 68 Millimeter
Manufacturer Name	NACHI
Weight / Kilogram	0
Internal Clearance	C0-Medium
Static Load Rating	11,500 N
Bore Diameter (mm)	40
Dynamic Load Rating	16,800 N
Outer Diameter (mm)	68
Minimum Buy Quantity	N/A
Fillet Radius/Chamfer	1 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	10,000 rpm
Internal Special	No

Features	
(Grease) Lubrication Speed	9500 r/min
Basic static load rating (C0)	11,5 kN
Basic dynamic load rating (C)	16,8 kN
Maximum Capacity / Filling Slot	No