




Bearing No. 6008ZZNR

D	68,000 mm
C	15,000 mm
B	15,000 mm
d	40,000 mm
Bore	1.575 Inch 40 Millimeter
Noun	Bearing
UNSPSC	31171504
series:	60
Category	Single Row Ball Bearing
Size (mm)	40x68x15
Enclosure	2 Metal Shields
Snap Ring	Yes
Inventory	0.0
Width (mm)	15,000
bore type:	Round
maximum rpm:	6100 RPM
Weight / LBS	0.423
Cage Material	Steel
closure type:	Double Shielded
Product Group	B00308
Inch - Metric	Metric
Bearing number	6008ZZNR
bore diameter:	40 mm
overall width:	15 mm
fillet radius:	1 mm
cage material:	Steel
Keyword String	Ball
Rolling Element	Ball Bearing
finish/coating:	Uncoated

Precision Class	ABEC 1 ISO P0
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	2.677 Inch 68 Millimeter
Long Description	40MM Bore; 68MM Outside Diameter; 15MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features
Outer Race Width	0.591 Inch 15 Millimeter
Weight / Kilogram	0.191
outer ring width:	15 mm
inner ring width:	15 mm
bearing material:	High Carbon Chrome Steel
Manufacturer Name	NTN
outside diameter:	68 mm
precision rating:	ISO Class 0
Bore Diameter (mm)	40,000
Internal Clearance	C0-Medium
Outer Diameter (mm)	68,000
snap ring included:	With Snap Ring
internal clearance:	CN
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
static load capacity:	11500 N
maximum rpm (grease):	10000 rpm
dynamic load capacity:	16800 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item	6008ZZNR/2A

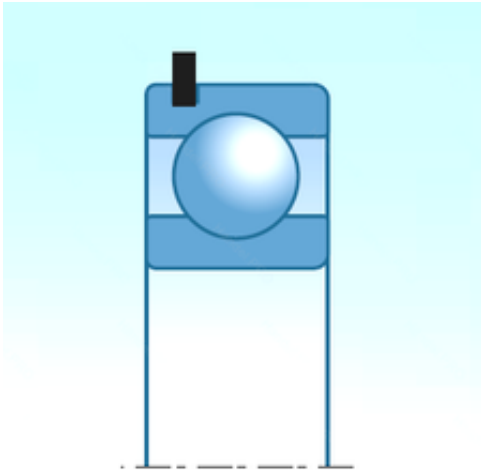

Number	
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Maximum Capacity / Filling Slot	No