


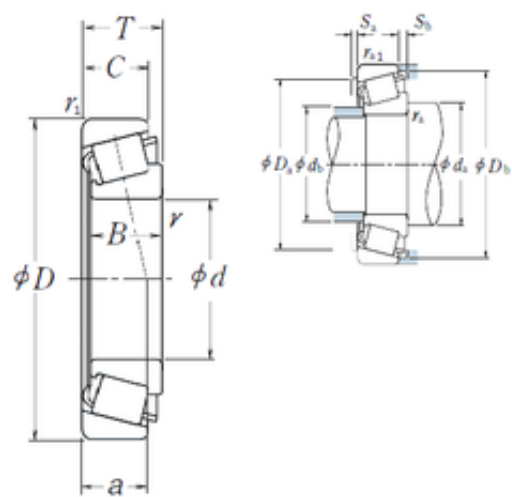

Bearing No. HR30313J

a	27,9 mm
e	0.35
d	65 mm
D	140 mm
T	36 mm
B	33 mm
C	28 mm
B_	33
da	83
Y0	0.96
C0	233
D_	140
Sb	8
Sa	4
db	83
Z_	16
Y1	1.7
C_	28
Cr	20400
DE_	123.286
Iso	2GB
DI_	85.503
C0r	23800
DA_	19.18
D_b	130
D_a2	121
SBRG	3
SDM_	104.395
D_a1	128
yobi	HR30313J

KBRG	3111
mass	2.51
TC-RA	286.417
r min.	3 mm
LangID	1
TC-DA2	18.37
Da min	121 mm
TC-SLR	23.4
ALPHA_	12.953
TC-DA1	19.99
Weight	2,51 Kg
T-ALP22	54
da min.	83 mm
r1 min.	2,5 mm
T-ALP21	25
db max.	83 mm
hidYobi	HR30313J
rb max.	2 mm
T-ALP23	20
Da max.	128 mm
Oil rpm	3600
GRS rpm	2600
ra max.	2,5 mm
inner r	3
Db min.	130 mm
outer r	2.5
inner ra	2.5
hidTable	ecat_NSTPRM
outer rb	2
Category	Bearings
TC-BET23	0
TC-BET21	4

TC-BET22	0
Inventory	0.0
Size (mm)	65x140x36
Prod_Type3	TRBSR_MD_A
Width (mm)	36
Product Group	B04334
Bearing number	HR30313J
Weight / Kilogram	2.51
Manufacturer Name	NSK
Bore Diameter (mm)	65
Outer Diameter (mm)	140
Minimum Buy Quantity	N/A
Calculation factor (e)	0,35
(Oil) Lubrication Speed	3600 r/min
Calculation factor (Y0)	0,96
(Grease) Lubrication Speed	2600 r/min
Basic dynamic load rating (C)	200 kN
Basic static load rating (C0)	233 kN