


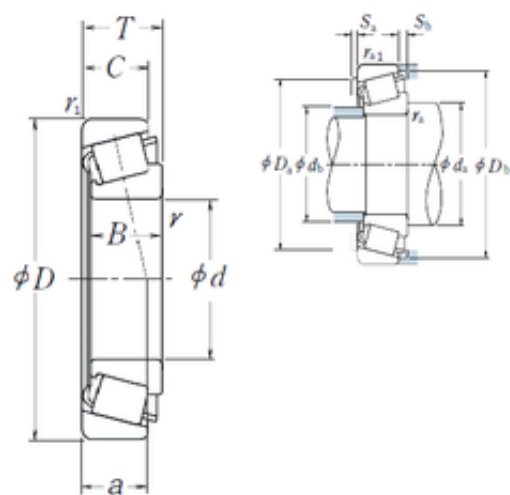

Bearing No. HR30236J

D	320 mm
d	180 mm
T	57 mm
B	52 mm
C	43 mm
a	61,8 mm
e	0.45
Cr	66000
Y0	0.73
db	210
da	207
Y1	1.3
B_	52
Sb	14
C0	930
Sa	9
D_	320
Z_	21
C_	43
C0r	95000
DA_	34.329
Iso	4GB
DE_	283.828
D_b	297
DI_	216.09
SBRG	2
SDM_	249.959
D_a2	281
KBRG	3111
yobi	HR30236J

D_a1	302
mass	17.8
TC-RA	510.68
r min.	5 mm
Weight	17,8 Kg
TC-DA1	35.642
TC-DA2	33.013
TC-SLR	38
Da min	281 mm
LangID	1
ALPHA_	16.7
Db min.	297 mm
Oil rpm	1400
db max.	210 mm
Da max.	302 mm
ra max.	4 mm
hidYobi	HR30236J
da min.	207 mm
T-ALP21	33
rb max.	3 mm
T-ALP22	23
T-ALP23	54
GRS rpm	1100
inner r	5
outer r	4
r1 min.	4 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	4
outer rb	3
TC-BET22	0

Size (mm)	180x320x57
Width (mm)	57
Prod_Type3	TRBSR_MD_A
Bearing number	HR30236J
Bore Diameter (mm)	180
Outer Diameter (mm)	320
Calculation factor (e)	0,45
Calculation factor (Y0)	0,73
(Oil) Lubrication Speed	1400 r/min
(Grease) Lubrication Speed	1100 r/min
Basic dynamic load rating (C)	650 kN
Basic static load rating (C0)	930 kN