


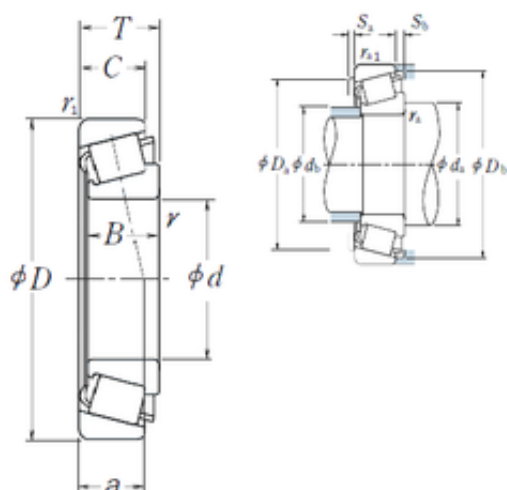

Bearing No. HR30304J

D	52 mm
d	20 mm
T	16,25 mm
B	15 mm
C	13 mm
a	11,6 mm
e	0.3
Cr	3550
Y0	1.1
db	27
da	31
Y1	2
B_	15
Sb	3
C0	33.5
Sa	2
D_	52
Z_	13
C_	13
C0r	3400
DA_	7.863
Iso	2FB
DE_	43.918
D_b	47.5
DI_	28.639
SBRG	3
SDM_	36.279
D_a2	44
KBRG	3111
yobi	HR30304J

D_a1	44
mass	0.172
TC-RA	117.977
r min.	1,5 mm
Weight	0,172 Kg
TC-DA1	8.234
TC-DA2	7.492
TC-SLR	10.7
Da min	44 mm
LangID	1
ALPHA_	11.31
Db min.	47,5 mm
Oil rpm	10000
db max.	27 mm
Da max.	44 mm
ra max.	1,5 mm
hidYobi	HR30304J
da min.	31 mm
T-ALP21	22
rb max.	1,5 mm
T-ALP22	37
T-ALP23	12
GRS rpm	7500
inner r	1.5
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	1.5
outer rb	1.5
TC-BET22	0

Size (mm)	20x52x16.25
Width (mm)	16,25
Prod_Type3	TRBSR_MD_A
Bearing number	HR30304J
Bore Diameter (mm)	20
Outer Diameter (mm)	52
Calculation factor (e)	0,3
Calculation factor (Y0)	1,1
(Oil) Lubrication Speed	10000 r/min
(Grease) Lubrication Speed	7500 r/min
Basic dynamic load rating (C)	35 kN
Basic static load rating (C0)	33,5 kN