


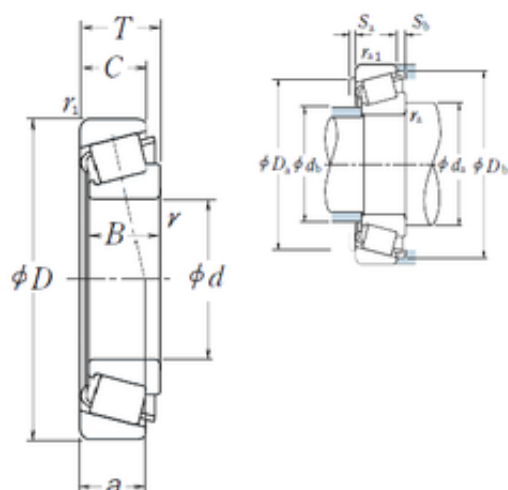

Bearing No. HR30306C

D	72 mm
d	30 mm
T	20,75 mm
B	19 mm
C	14 mm
a	18,5 mm
e	0.55
Cr	5800
Y0	0.6
db	38
da	41
Y1	1.1
B_	19
Sb	6.5
C0	55.5
Sa	3
D_	72
Z_	13
C_	14
C0r	5650
DA_	10.954
Iso	-
DE_	61.096
D_b	67
DI_	40.287
SBRG	3
SDM_	50.692
D_a2	59
KBRG	3111
yobi	HR30306C

D_a1	63
mass	0.383
TC-RA	96.144
r min.	1,5 mm
Weight	0,383 Kg
TC-DA1	11.737
TC-DA2	10.171
TC-SLR	13
Da min	59 mm
LangID	1
ALPHA_	20
Db min.	67 mm
Oil rpm	7100
db max.	38 mm
Da max.	63 mm
ra max.	1,5 mm
hidYobi	HR30306C
da min.	41 mm
T-ALP21	40
rb max.	1,5 mm
T-ALP22	0
T-ALP23	0
GRS rpm	5300
inner r	1.5
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	7
inner ra	1.5
outer rb	1.5
TC-BET22	0

Size (mm)	30x72x20.75
Width (mm)	20,75
Prod_Type3	TRBSR_MD_A
Bearing number	HR30306C
Bore Diameter (mm)	30
Outer Diameter (mm)	72
Calculation factor (e)	0,55
Calculation factor (Y0)	0,6
(Oil) Lubrication Speed	7100 r/min
(Grease) Lubrication Speed	5300 r/min
Basic dynamic load rating (C)	56,5 kN
Basic static load rating (C0)	55,5 kN