


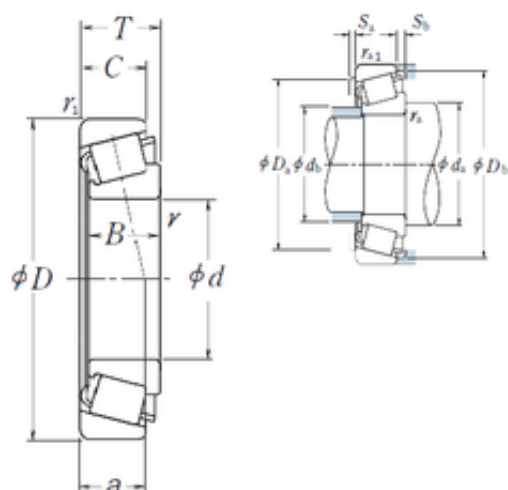

Bearing No. HR30307DJ

D	80 mm
d	35 mm
T	22,75 mm
B	21 mm
C	15 mm
a	25,2 mm
e	0.83
Cr	6350
Y0	0.4
db	44
da	51
Y1	0.73
B_	21
Sb	7.5
C0	68
Sa	3
D_	80
Z_	16
C_	15
C0r	6950
DA_	10.235
Iso	7FB
DE_	67.111
D_b	77
DI_	47.822
SBRG	3
SDM_	57.467
D_a2	62
KBRG	3111
yobi	HR30307DJ

D_a1	71
mass	0.519
TC-RA	75.984
r min.	2 mm
Weight	0,519 Kg
TC-DA1	11.258
TC-DA2	9.212
TC-SLR	14
Da min	62 mm
LangID	1
ALPHA_	28.811
Db min.	77 mm
Oil rpm	6000
db max.	44 mm
Da max.	71 mm
ra max.	2 mm
hidYobi	HR30307DJ
da min.	51 mm
T-ALP21	57
rb max.	1,5 mm
T-ALP22	37
T-ALP23	18
GRS rpm	4300
inner r	2
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	8
inner ra	2
outer rb	1.5
TC-BET22	30

Size (mm)	35x80x22.75
Width (mm)	22,75
Prod_Type3	TRBSR_MD_A
Bearing number	HR30307DJ
Bore Diameter (mm)	35
Outer Diameter (mm)	80
Calculation factor (e)	0,83
Calculation factor (Y0)	0,4
(Oil) Lubrication Speed	6000 r/min
(Grease) Lubrication Speed	4300 r/min
Basic dynamic load rating (C)	62 kN
Basic static load rating (C0)	68 kN