


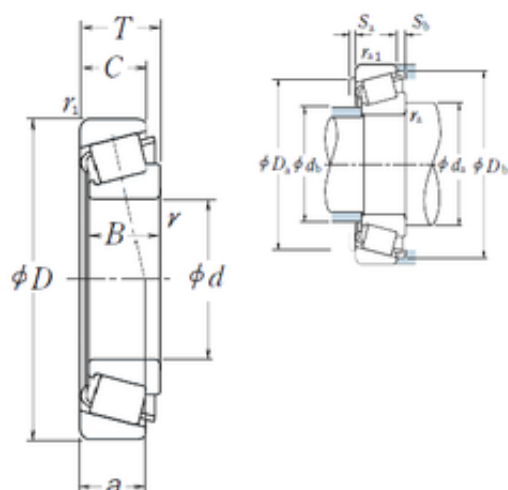

Bearing No. HR30212J

a	22 mm
e	0.41
d	60 mm
D	110 mm
T	23,75 mm
B	22 mm
C	19 mm
B_	22
da	72
Y0	0.81
C0	123
D_	110
Sb	4.5
Sa	4
db	69
Z_	19
Y1	1.5
C_	19
Cr	10600
DE_	97.006
Iso	3EB
DI_	71.454
C0r	12500
DA_	12.951
D_b	103
D_a2	96
SBRG	2
SDM_	84.23
D_a1	101
yobi	HR30212J

KBRG	3111
mass	0.93
TC-RA	193
r min.	2 mm
LangID	1
TC-DA2	12.432
Da min	96 mm
TC-SLR	15
ALPHA_	15.109
TC-DA1	13.47
Weight	0,93 Kg
T-ALP22	13
da min.	72 mm
r1 min.	1,5 mm
T-ALP21	30
db max.	69 mm
hidYobi	HR30212J
rb max.	1,5 mm
T-ALP23	8
Da max.	101 mm
Oil rpm	4500
GRS rpm	3400
ra max.	2 mm
inner r	2
Db min.	103 mm
outer r	1.5
inner ra	2
hidTable	ecat_NSTPRM
outer rb	1.5
Category	Bearings
TC-BET23	0
TC-BET21	4

TC-BET22	0
Inventory	0.0
Size (mm)	60x110x23.75
Prod_Type3	TRBSR_MD_A
Width (mm)	23,75
Product Group	B04334
Bearing number	HR30212J
Weight / Kilogram	0.93
Manufacturer Name	NSK
Bore Diameter (mm)	60
Outer Diameter (mm)	110
Minimum Buy Quantity	N/A
Calculation factor (e)	0,41
(Oil) Lubrication Speed	4500 r/min
Calculation factor (Y0)	0,81
(Grease) Lubrication Speed	3400 r/min
Basic dynamic load rating (C)	104 kN
Basic static load rating (C0)	123 kN