


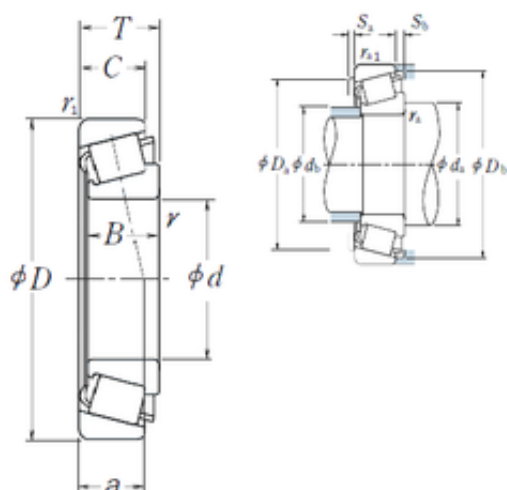

Bearing No. HR30215J

D	130 mm
d	75 mm
T	27,25 mm
B	25 mm
C	22 mm
a	27 mm
e	0.44
Cr	14600
Y0	0.76
db	85
da	87
Y1	1.4
B_	25
Sb	5
C0	182
Sa	4
D_	130
Z_	20
C_	22
C0r	18500
DA_	14.574
Iso	4DB
DE_	116.788
D_b	124
DI_	87.995
SBRG	2
SDM_	102.392
D_a2	115
KBRG	3111
yobi	HR30215J

D_a1	121
mass	1.43
TC-RA	218
r min.	2 mm
Weight	1,43 Kg
TC-DA1	15.215
TC-DA2	13.933
TC-SLR	18.5
Da min	115 mm
LangID	1
ALPHA_	16.173
Db min.	124 mm
Oil rpm	3800
db max.	85 mm
Da max.	121 mm
ra max.	2 mm
hidYobi	HR30215J
da min.	87 mm
T-ALP21	32
rb max.	1,5 mm
T-ALP22	20
T-ALP23	40
GRS rpm	2800
inner r	2
outer r	1.5
r1 min.	1,5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	2
outer rb	1.5
TC-BET22	0

Size (mm)	75x130x27.25
Width (mm)	27,25
Prod_Type3	TRBSR_MD_A
Bearing number	HR30215J
Bore Diameter (mm)	75
Outer Diameter (mm)	130
Calculation factor (e)	0,44
Calculation factor (Y0)	0,76
(Oil) Lubrication Speed	3800 r/min
(Grease) Lubrication Speed	2800 r/min
Basic dynamic load rating (C)	143 kN
Basic static load rating (C0)	182 kN