


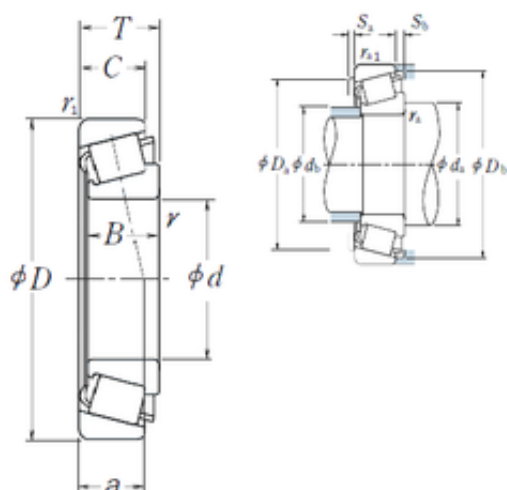

Bearing No. HR30217J

D	150 mm
d	85 mm
T	30,5 mm
B	28 mm
C	24 mm
a	30,3 mm
e	0.42
Cr	18700
Y0	0.79
db	97
da	100
Y1	1.4
B_	28
Sb	6.5
C0	233
Sa	5
D_	150
Z_	20
C_	24
C0r	23800
DA_	17.245
Iso	3EB
DE_	133.405
D_b	141
DI_	99.662
SBRG	2
SDM_	116.534
D_a2	133
KBRG	3111
yobi	HR30217J

D_a1	140
mass	2.12
TC-RA	257
r min.	2,5 mm
Weight	2,12 Kg
TC-DA1	17.937
TC-DA2	16.552
TC-SLR	20
Da min	133 mm
LangID	1
ALPHA_	15.643
Db min.	141 mm
Oil rpm	3200
db max.	97 mm
Da max.	140 mm
ra max.	2 mm
hidYobi	HR30217J
da min.	100 mm
T-ALP21	31
rb max.	2 mm
T-ALP22	17
T-ALP23	4
GRS rpm	2400
inner r	2.5
outer r	2
r1 min.	2 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	2
outer rb	2
TC-BET22	0

Size (mm)	85x150x30.5
Width (mm)	30,5
Prod_Type3	TRBSR_MD_A
Bearing number	HR30217J
Bore Diameter (mm)	85
Outer Diameter (mm)	150
Calculation factor (e)	0,42
Calculation factor (Y0)	0,79
(Oil) Lubrication Speed	3200 r/min
(Grease) Lubrication Speed	2400 r/min
Basic dynamic load rating (C)	184 kN
Basic static load rating (C0)	233 kN