


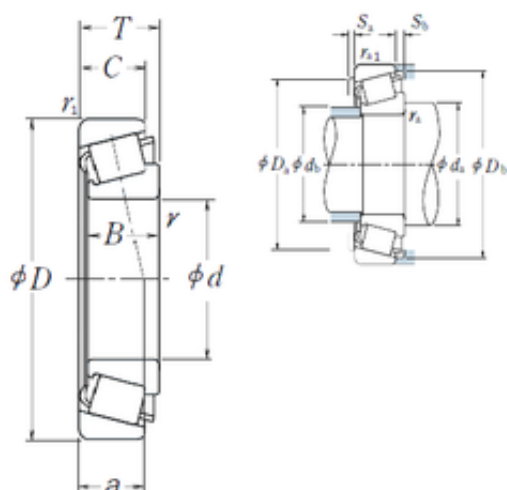

Bearing No. 30260

D	540 mm
d	300 mm
T	96 mm
B	85 mm
C	71 mm
a	105,1 mm
e	0.44
Cr	147000
Y0	0.74
db	355
da	333
Y1	1.4
B_	85
Sb	25
C0	2100
Sa	14
D_	540
Z_	18
C_	71
C0r	214000
DA_	58.563
Iso	-
DE_	477.031
D_b	499
DI_	363.142
SBRG	2
SDM_	420.087
D_a2	470
KBRG	3111
yobi	30260

D_a1	518
mass	80.6
TC-RA	868.297
r min.	6 mm
Weight	80,6 Kg
TC-DA1	60.602
TC-DA2	56.523
TC-SLR	59
Da min	470 mm
LangID	1
ALPHA_	16.5
Db min.	499 mm
Oil rpm	800
db max.	355 mm
Da max.	518 mm
ra max.	5 mm
hidYobi	30260
da min.	333 mm
T-ALP21	33
rb max.	4 mm
T-ALP22	0
T-ALP23	0
GRS rpm	600
inner r	6
outer r	5
r1 min.	5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	5
outer rb	4
TC-BET22	0

Size (mm)	300x540x96
Width (mm)	96
Prod_Type3	TRBSR_MD_A
Bearing number	30260
Bore Diameter (mm)	300
Outer Diameter (mm)	540
Calculation factor (e)	0,44
Calculation factor (Y0)	0,74
(Oil) Lubrication Speed	800 r/min
(Grease) Lubrication Speed	600 r/min
Basic dynamic load rating (C)	1440 kN
Basic static load rating (C0)	2100 kN