


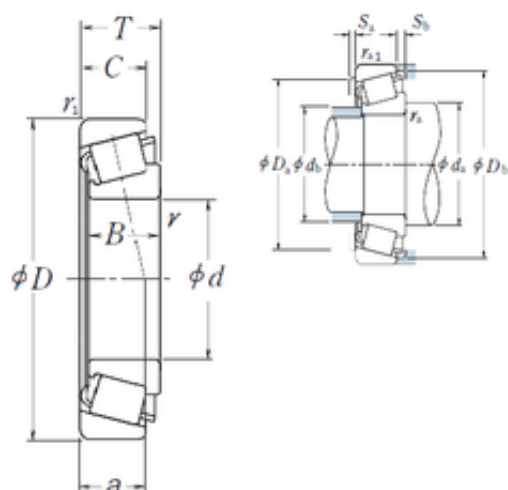

Bearing No. 30264

D	580 mm
d	320 mm
T	104 mm
B	92 mm
C	75 mm
a	113,7 mm
e	0.44
Cr	168000
Y0	0.74
db	381
da	353
Y1	1.4
B_	92
Sb	29
C0	2420
Sa	14
D_	580
Z_	18
C_	75
C0r	247000
DA_	62.818
Iso	-
DE_	510.774
D_b	533
DI_	389.532
SBRG	2
SDM_	450.153
D_a2	503
KBRG	3111
yobi	30264

D_a1	558
mass	99.3
TC-RA	931.246
r min.	6 mm
Weight	99,3 Kg
TC-DA1	64.995
TC-DA2	60.64
TC-SLR	63
Da min	503 mm
LangID	1
ALPHA_	16.5
Db min.	533 mm
Oil rpm	750
db max.	381 mm
Da max.	558 mm
ra max.	5 mm
hidYobi	30264
da min.	353 mm
T-ALP21	33
rb max.	4 mm
T-ALP22	0
T-ALP23	0
GRS rpm	530
inner r	6
outer r	5
r1 min.	5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	5
outer rb	4
TC-BET22	0

Size (mm)	320x580x104
Width (mm)	104
Prod_Type3	TRBSR_MD_A
Bearing number	30264
Bore Diameter (mm)	320
Outer Diameter (mm)	580
Calculation factor (e)	0,44
Calculation factor (Y0)	0,74
(Oil) Lubrication Speed	750 r/min
(Grease) Lubrication Speed	530 r/min
Basic dynamic load rating (C)	1640 kN
Basic static load rating (C0)	2420 kN