


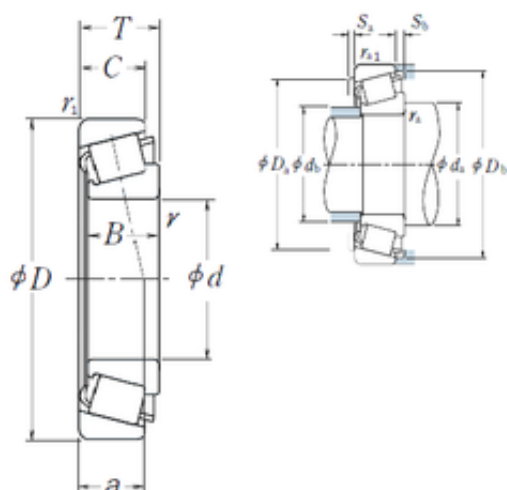

Bearing No. HR30203J

|      |          |
|------|----------|
| D    | 40 mm    |
| d    | 17 mm    |
| T    | 13,25 mm |
| B    | 12 mm    |
| C    | 11 mm    |
| a    | 9,7 mm   |
| e    | 0.35     |
| Cr   | 2050     |
| Y0   | 0.96     |
| db   | 23       |
| da   | 26       |
| Y1   | 1.7      |
| B_   | 12       |
| Sb   | 2        |
| C0   | 19.9     |
| Sa   | 2        |
| D_   | 40       |
| Z_   | 15       |
| C_   | 11       |
| C0r  | 2030     |
| DA_  | 5.307    |
| Iso  | 2DB      |
| DE_  | 33.938   |
| D_b  | 37.5     |
| DI_  | 23.631   |
| SBRG | 2        |
| SDM_ | 28.785   |
| D_a2 | 34       |
| KBRG | 3111     |
| yobi | HR30203J |
|      |          |

|          |             |
|----------|-------------|
| D_a1     | 34          |
| mass     | 0.079       |
| TC-RA    | 80          |
| r min.   | 1 mm        |
| Weight   | 0,079 Kg    |
| TC-DA1   | 5.584       |
| TC-DA2   | 5.029       |
| TC-SLR   | 8           |
| Da min   | 34 mm       |
| LangID   | 1           |
| ALPHA_   | 12.953      |
| Db min.  | 37,5 mm     |
| Oil rpm  | 13000       |
| db max.  | 23 mm       |
| Da max.  | 34 mm       |
| ra max.  | 1 mm        |
| hidYobi  | HR30203J    |
| da min.  | 26 mm       |
| T-ALP21  | 25          |
| rb max.  | 1 mm        |
| T-ALP22  | 54          |
| T-ALP23  | 20          |
| GRS rpm  | 9500        |
| inner r  | 1           |
| outer r  | 1           |
| r1 min.  | 1 mm        |
| hidTable | ecat_NSTPRM |
| TC-BET23 | 0           |
| TC-BET21 | 4           |
| inner ra | 1           |
| outer rb | 1           |
| TC-BET22 | 0           |
|          |             |

|                               |             |
|-------------------------------|-------------|
| Size (mm)                     | 17x40x13.25 |
| Width (mm)                    | 13,25       |
| Prod_Type3                    | TRBSR_MD_A  |
| Bearing number                | HR30203J    |
| Bore Diameter (mm)            | 17          |
| Outer Diameter (mm)           | 40          |
| Calculation factor (e)        | 0,35        |
| Calculation factor (Y0)       | 0,96        |
| (Oil) Lubrication Speed       | 13000 r/min |
| (Grease) Lubrication Speed    | 9500 r/min  |
| Basic dynamic load rating (C) | 20,1 kN     |
| Basic static load rating (C0) | 19,9 kN     |