


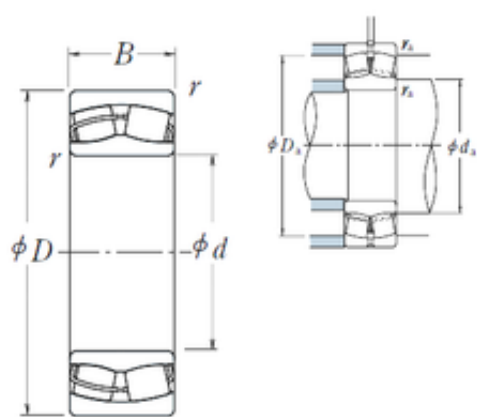

Bearing No. 23234CE4

|      |          |
|------|----------|
| r    | 4        |
| d    | 170 mm   |
| D    | 310 mm   |
| B    | 110 mm   |
| C    | 110 mm   |
| e    | 0.34     |
| Y2   | 2.9      |
| C0   | 1910     |
| D_   | 310      |
| B_   | 110      |
| Y0   | 1.9      |
| ra   | 3        |
| Y1   | 2        |
| X0   | 1        |
| X1   | 1        |
| X2   | 0.67     |
| Y3   | 2        |
| Z_   | 18       |
| DE_  | 274.956  |
| DA_  | 34       |
| SIR  | 44       |
| DI_  | 208.654  |
| bomp | 23234CE4 |
| SBRG | 32       |
| KBRG | 2322     |
| SDM_ | 241.805  |
| ALP1 | 12       |
| mass | 36.4     |
| yobi | 23234CE4 |
| ALP3 | 0        |
|      |          |

|                        |                 |
|------------------------|-----------------|
| ALP2                   | 50              |
| da min                 | 188             |
| r min.                 | 4 mm            |
| da max                 | 201 mm          |
| Da min                 | 261 mm          |
| Weight                 | 36,4 Kg         |
| LangID                 | 1               |
| ALPHA_                 | 0.224           |
| D_a max                | 292             |
| Da max.                | 292 mm          |
| da min.                | 188 mm          |
| Oil rpm                | 1200            |
| D_a min                | 261             |
| GRS rpm                | 900             |
| hidYobi                | 23234CE4        |
| TSR rpm                | 1400            |
| ra max.                | 3 mm            |
| Category               | Roller Bearings |
| hidTable               | ecat_NSSPHR     |
| Macha rpm              | 0               |
| Size (mm)              | 170x310x110     |
| Inventory              | 0.0             |
| Prod_Type3             | SRB_CTB_CB      |
| Width (mm)             | 110             |
| Product Group          | B04311          |
| Bearing number         | 23234CE4        |
| Manufacturer Name      | NSK             |
| Weight / Kilogram      | 36.3            |
| Bore Diameter (mm)     | 170             |
| Outer Diameter (mm)    | 310             |
| Minimum Buy Quantity   | N/A             |
| Calculation factor (e) | 0,34            |
|                        |                 |

|                               |            |
|-------------------------------|------------|
| (Oil) Lubrication Speed       | 1200 r/min |
| Calculation factor (Y0)       | 1,9        |
| Calculation factor (Y2)       | 2,9        |
| (Grease) Lubrication Speed    | 900 r/min  |
| Basic dynamic load rating (C) | 1200 kN    |
| Basic static load rating (C0) | 1910 kN    |